



SINCE 1907

A collection of various electrical components including switches, relays, and terminal blocks. The components are arranged on a white background. There are several rotary switches with different labels like 'AUTOM.', 'AUF', 'ZU', 'AUS', 'HARD', 'AUTO', and 'I'. Some have red or yellow handles. There are also terminal blocks with white plastic covers and a blue component with a red handle. A black component with a red handle is also visible.

KRAUS & NAIMER


The development of the Blue Line rotary switch, contactor and motor starter product ranges is based on more than seventy-five years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

BLUE LINE

Blue Line products are protected by numerous patents throughout the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark




WORLDWIDE SYMBOL
FOR QUALITY SWITCHGEAR

Contents	Description Page	Dimensions Page
Construction Data	2	-
How to order	3	-
Optional Extras:		
Additional screw terminal for CL switches	4	40
Add-on Escutcheon Plates	22	40
Auxiliary Contacts	8	28
Bayonet/Switch Coupling	11	33
Door Clutches	5, 6	28, 29
Electromechanical Interlock	10	32
Ground and Neutral Terminal	11	34
Indicator Lamp Devices	6, 7	27, 30
Interlock between Switches	9	31
Key-lock Devices	15-19	35-38
Motor Drive	14	34
Padlock Devices	20	38, 39
Position Indicator	8	-
Protective Cover	11	-
Push Button Interlock	10	32
Push-pull Interlock	9	31
Ratchet Coupling	13	33
Shaft Extension	4	27
Slip Clutch	13	33
Special Drive Units	12	34
Spring Return over several Positions	13	30
Stop and Go Device	9	30
Tandem Drives	11	31
Terminal Lugs	4	-
Trip Devices	14	33
Trip Indicator	8	-
Uni-directional Interlock	13	-
Switch Type Variations	21	39, 40
Enclosures	23-26	41-43
Blue Line Switchgear: Summary	44	-

Construction Data

The large cam switch line of the A, C, CA, CAD, CG, CH, CHR, CL, D, L and X-series is complemented by a large number of optional extras and enclosures.

This substantial number of optional extras and enclosures is needed in order to meet the requirements of the world market.

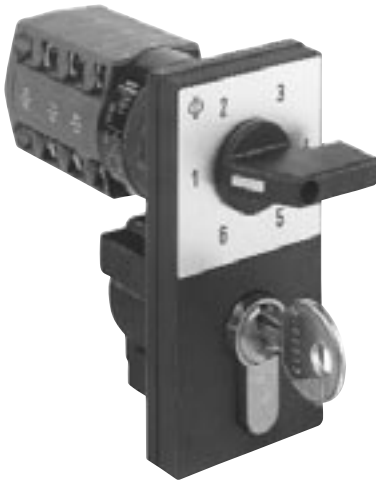

One or more optional extras may be used in combination with any one switch provided they are of the same switch size. A few exceptions where this cannot be accomplished are noted on the following tables. In some cases, for technical strength or esthetic reason, it may be desirable that a switch be combined with an optional feature of the next larger switch size. Many options provide for such a possibility.



Enclosures are manufactured from plastic or aluminum material. They offer a high degree of protection (up to IP 66/67) thereby permitting switch operation under adverse environmental conditions. The materials used provide considerable strength and the best possible protection against corrosion. A large number of possibilities exist for combining switches, enclosures and appropriate optional extras.

How to order

Disconnectors and Main Switches with Optional Extras acc. to IEC 60947-3 see Catalog 500

When ordering Blue Line cam switches with optional extras, the following method of coding is required. Details on the enclosures and optional extras are shown in this catalog.

1. Switch Type

See Catalog 100, 110, 120, 130 or 140.

2. Switch Function

See Catalog 100, 110, 120, 130 or 140.

3. Type of Mounting

See Catalog 100, 110, 120, 130 or 140.

4. Enclosures

The assigned code numbers for the various enclosures are shown in this catalog on pages 23-26.

CA20B

**A202
V840F/F**

PN


5. Optional Extras

Pages 4-22 list optional extras and their coding. A ● indicates the switch sizes in which the optional extra shown is available.


Possible combinations of switches of the same switch size with an optional extra of the next larger switch size are indicated by a ●. Only in this case indicate the next larger switch size in front of the coding.


There are some optional extras in existence which are available in a variety of programs. Additional ordering data may, therefore, be required. In the above case, a color description is required for the cover and handle disc.

Switch Types	Size of Mounting	Switch Types	Size of Mounting	Switch Types	Size of Mounting	Switch Types	Size of Mounting	Switch Types	Size of Mounting
A11	S1	CA25B	S1	CHR10B	S1	DKR12	S0	L2000	S3
A11C	S2	CA40	S1	CHR16	S0	DH12	S0	X200	S3
A14	S1	CA50	S1	CHR16B	S1	DHR12	S0	X400	S3
A14C	S2	CA63	S1	CL4	S00	DH12B	S1	X630	S3
C80	S2	CAD11	S0	CL10	S0	DHR12B	S1		
C125	S2	CAD12	S0	DK10	S0	L350	S2		
C315	S3	CG4	S00	DKR10	S0	L351	S2		
C316	S3	CG4-1	S00	DH10	S0	L400	S3		
CA4	S00	CGD4-1	S00	DHR10	S0	L600	S3		
CA4-1	S00	CG6	S00	DH10B	S1	L630	S2		
CA10	S0	CG8	S0	DHR10B	S1	L631	S2		
CA10R	S0	CH6	S00	DK11	S0	L800	S3		
CA10B	S1	CH10	S0	DKR11	S0	L1000	S2		
CA11	S0	CH10B	S1	DH11	S0	L1001	S2		
CA11B	S1	CH16	S0	DHR11	S0	L1200	S3		
CA20	S0	CH16B	S1	DH11B	S1	L1250	S2		
CA20B	S1	CHR6	S00	DHR11B	S1	L1251	S2		
CA25	S0	CHR10	S0	DK12	S0	L1600	S3		

Optional Extras		Code	For Switch Sizes				
			S00	S0	S1	S2	S3
Terminal Lugs							
	For screw with wire clamps Terminal lugs facilitate the connecting of wires in installations where the terminals are not easily accessible. All X switches, L switches and switches type C315/ C316 will be supplied with terminal lugs as standard.	M900			A11	●	●
	 Terminal lugs for quick connect termination Each quick connect terminal may accept either one 6,3 mm quick connect lug or two 2,8 mm quick connect lugs. Switch type CA4 only accepts one quick connect lug 2,8 mm.	M930	CA4 ¹	CHR10 CHR16 DH10 DK10	A11 A14 CHR10B CHR16B DH10B		
Additional Screw Terminal for CL Switches							
	For connecting 2 wires per terminal for CL4 for CL10	S00 D420 DA S0F D120 DA					
Shaft Extension							
	With asymmetric profile Shaft length not adjustable Shaft with unlimited adjustable length with set screw with shear ring Adjustable shaft can be set to the desired length in a pre-mounted switch with VE mounting plate.	L100 M004D M004		●	●		
	With square profile Shaft length not adjustable Shaft with unlimited adjustable length with set screw with clamping bushing	L100A M004E M004A		●	●	●	●
Ordering data:		Free shaft length or dimension from mounting surface to cover.					

¹The coding of the switch type may change as shown in Catalog 100, 120 and 130, page 4.

Optional Extras		Code	For Switch Sizes																											
			S0	S1	S2	S3																								
Standard Door Clutch																														
	With profile extension parts Front protection IP 40 Front protection IP 66/67 Listed below are the most commonly used programs: <table><tr><th>No.</th><th>Description</th></tr><tr><td>A1</td><td>Without protected profile, without interlock.</td></tr><tr><td>A2</td><td>With protected profile, without interlock.</td></tr><tr><td>B2</td><td>With protected profile and interlock by door clutch.</td></tr><tr><td>C2</td><td>With protected profile and interlock by rods.</td></tr><tr><td>D2</td><td>With protected profile, interlock by door clutch and rods.</td></tr></table>	No.	Description	A1	Without protected profile, without interlock.	A2	With protected profile, without interlock.	B2	With protected profile and interlock by door clutch.	C2	With protected profile and interlock by rods.	D2	With protected profile, interlock by door clutch and rods.	M280 M280/.EF		● ●	● ●	● ●												
No.	Description																													
A1	Without protected profile, without interlock.																													
A2	With protected profile, without interlock.																													
B2	With protected profile and interlock by door clutch.																													
C2	With protected profile and interlock by rods.																													
D2	With protected profile, interlock by door clutch and rods.																													
	With shaft extension, shaft with unlimited adjustable length shaft fixation with set screw Front protection IP 40 Front protection IP 66/67 (S0: IP 65) shaft fixation with shear ring Front protection IP 40 Front protection IP 66/67 (S0: IP 65) With shaft extension, shaft with unlimited adjustable length The M700 is a padlock door clutch and a mechanical interlocking safety device. Using the device the electrical panel may be opened only when the switch is in OFF position. Note: Knowledgeable personnel using a simple tool are able to defeat the interlock. The M700's flexibility allows for successful installation with as much as + or - 5 mm of misalignment between shaft and door.	M280E M280E/.EF M280D M280D/.EF	●● ●●	● ●	● ●																									
	Handle lockable with padlocks Protection IP 66 Selection of escutcheon plate and handle color required: <table><tr><th>Escutcheon Plate</th><th>Frame Plate</th><th>Handle</th><th>Lock Bar</th></tr><tr><td>A = brushed alu</td><td>black</td><td>black</td><td>red</td></tr><tr><td>B = brushed alu</td><td>black</td><td>red</td><td>yellow</td></tr><tr><td>C = brushed black</td><td>black</td><td>black</td><td>red</td></tr><tr><td>D = brushed black</td><td>black</td><td>red</td><td>yellow</td></tr><tr><td>E = yellow</td><td>black</td><td>red</td><td>yellow</td></tr></table>	Escutcheon Plate	Frame Plate	Handle	Lock Bar	A = brushed alu	black	black	red	B = brushed alu	black	red	yellow	C = brushed black	black	black	red	D = brushed black	black	red	yellow	E = yellow	black	red	yellow	M700/.	●	●	●	●
Escutcheon Plate	Frame Plate	Handle	Lock Bar																											
A = brushed alu	black	black	red																											
B = brushed alu	black	red	yellow																											
C = brushed black	black	black	red																											
D = brushed black	black	red	yellow																											
E = yellow	black	red	yellow																											
	Standard handle and standard escutcheon plate Protection IP 65	M701	●	●	●																									
	Unlock insert for the M700 to open the door in ON position. (After the locking has been made inactive, it is necessary to take effective precautions against an opening of the door by unauthorized persons.)	S1D M700 29																												
Ordering data:		Dimension from face of the switch to the cover or dimension from mounting surface to cover as well as the interlock program and the color selection.																												

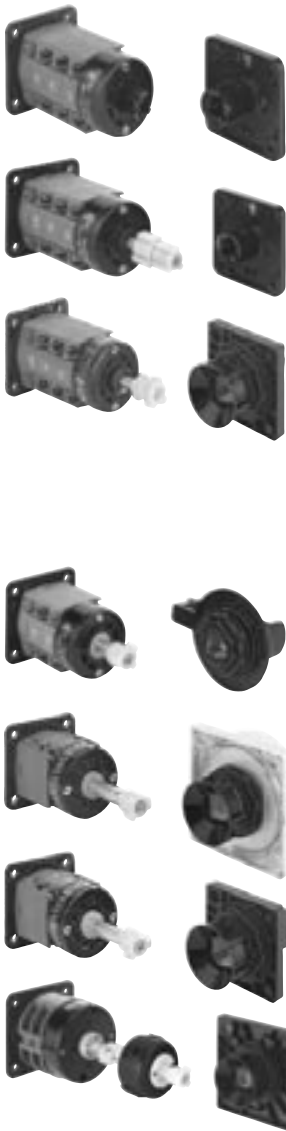
Optional Extras		Code	For Switch Sizes			
			S0	S1	S2	S3
Simplified Door Clutch						
	The simplified door clutches are utilized primarily when the switch is mounted to the bottom of the enclosure and the handle and the escutcheon plate are mounted on the cover. With profile extension parts Front protection IP 40 Front protection IP 65	M290/A1 M290/A1.EF	● ● ●	● ●	● ●	● ●
	With shaft extension Front protection IP 40 Front protection IP 65	M290/A3 M290/A3.EF	● ● ●	● ●	● ●	● ●
	Single hole mounting 22 mm, protection IP 66. Additional profile extension parts and shaft extension must be specified. For shaft extension For profile extension parts	M295/.A M295/.B	● ●	● ●		
	With padlock device and single hole mounting 22 mm, protection IP 66. Additional shaft extension must be specified.	V840E	●	●		
	The cover disc is available in black, yellow and electro-gray. The handle may be supplied in red, black and electro-gray.					
	For 3 padlocks For 4 padlocks	V840G V840F	● ●	● ●		
	Operation of the locking bar from the front. Available in black, red and electro-gray.	V845	●	●		
	Centering aid for simplified door clutches with single hole mounting and shaft extension Misalignment between the shaft and mounting are compensated in all 4 directions.	M600		●		
Ordering data:		Free shaft length or dimension from mounting surface to cover or distance from face of the switch to the cover and color selection.				

Indicator Lamp Device (without Lamp)

	With square escutcheon plate With white lamp socket¹ Without lamp socket The lamp socket for switch size S0 had been designed for glowing lamps with socket E10. For switches size S1, S2 and S3 the sockets are provided for lamps with thread E14.	Q200/A1 Q200/A2	● ●	● ●	● ●	● ●
	With rectangular escutcheon plate With white lamp socket¹ Without lamp socket ¹Additional colors on request.	Q200/B1 Q200/B2	● ●	● ●	● ●	● ●

Optional Extras	Code	For Switch Sizes			
		S00	S0	S1	S2

Control and Indicator Device (without Lamp)

	For 1 lamp with socket BA 9s Max. power 2,8 W The control and indicator device includes a single hole mounting 30 mm with locking nut and can be supplied with the following front end assemblies: Front ring (alternatively with add-on escutcheon plate), Escutcheon plate 48 x 48 mm (alternatively with add-on escutcheon plate) or escutcheon plate 64 x 64 mm. The operation may be as follows: Turn to operate Push-to-turn operation (interlock as control and alarm switch) This type of version is available with 1 or 2 auxiliary contacts. Select between a contact system with a rigid contact bridge for excellent AC-15 making and breaking capabilities which is also available with gold contacts for use in aggressive environments or a H-bridge design with "cross-wire" contact system with gold-plated contacts for low voltages and currents.	Q110 Q110/F	● ●					
	Removal aid for control and indicator device For 6 lamps with socket T6,8 Length of lamp 42-44 mm Max. power per lamp 2,5 W According to the operating voltage the lamps have to be paralleled or connected in series. As front end assembly the alu-escutcheon plate 51,8 x 51,8 mm is supplied.						S0E Q110 09 Q100/A	●
Ordering data:	For size S0 the front end assembly, the quantity and operation of the auxiliary contacts and type of the contact system.							

Control and Indicator Device with Light Conductor

	The luminous source is a LED module with yellow light-emitting diode mounted at the end of the switch. The transmission of light occurs via a light conductor. Operating voltage 24 V AC/DC 60 V AC, 60 V DC 110 V AC, 110 V DC 230 V AC with test terminal 24 V DC 60 V DC 110 V DC <u>Types of version</u> Without interlock (handle “turn to operate”) With interlock (handle “push to turn”) The control and indicator device is available for single hole mounting and mosaic.	Q100B	●			
Ordering data:	Operating voltage and type of version.					

Optional Extras		Code	For Switch Sizes			
			S0	S1	S2	S3
Trip Indicator						
	With square escutcheon plate	M120/A	●	●		
	With rectangular escutcheon plate	M120/B	●	●		
The trip indicator used on switches with spring return positions. It includes a colored indicator to show the last SR position that handle has been turned. Two possibilities for flag indicator exist: a) left red - right green b) left green - right red						
Ordering data:		The color to appear after left or right operation.				
Position Indicator						
	The position indicator shows the location of the switch position, even when the panel door is open and the escutcheon plate is not visible.	M150		●	●	●
Auxiliary Contacts						
	These auxiliary contacts are controlled with a cam which can be programmed. The max. number of the auxiliary contacts for switches of size S1 and S2 is 4 pcs. and for switches of size S3 is 6 pcs. Select between a contact system with a rigid bridge for excellent AC-15 making and breaking capabilities or a H-bridge design with “cross-wire” contacts (sizes S1 and S2) for low voltages and currents. The contact systems with gold contacts or gold-plated contacts allow for use in aggressive environments also. In cases where more than 4 resp. 6 auxiliary contacts are required, an auxiliary switch should be used alternatively.	M510B		A11 A14 CA40 CA50 CA63	C80 C125 L350- L1251	●
Ordering data:		Quantity and operation of the auxiliary contacts and type of the contact system.				

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3


Push-pull Interlock

	To pull lateral spring return To pull lateral latching To push lateral spring return To push lateral latching	V110A V115A V130A V135A	● ● ● ●			
	The push-pull device is used to interlock the switch so that the handle can be rotated only when pushed or pulled. The push-pull device can be programmed to allow the interlock to operate only between pre-determined switch positions. Auxiliary contacts can be operated by means of the axial movement of the handle. For switches size S0 the max. number of auxiliary contacts is 2 pieces for all other sizes 8 pieces. In addition switches size S0 can also be combined with a trip indicator. To pull lateral spring return To pull lateral latching To pull and to push lateral spring return To push lateral spring return To push lateral latching	V110 V115 V120 V130 V135	● ● ● ● ●	● ● ● ● ●	● ● ● ● ●	
Ordering data:	Description of the interlocking program, number and operation of the auxiliary contacts.					

Stop and Go Device

	The stop and go device prevents a fast switching thru the center OFF position. This is only possible with a 60° switching angle. The stop and go device only becomes activated in the center switch position, in either in both or one direction.	V160	●			
Ordering data:	Operation of the stop and go device.					

Interlock between Switches

	For 2 switch columns An interlock between 2 or 3 switch columns permits the operation of one switch only when the other switch or switches are located in a pre-determined switching position. For heavy duty service reinforced devices are available.	V600/B		●	●	●
	For 3 switch columns	V600/C		●	●	●
Ordering data:	Description of the interlocking program.					

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

Push Button Interlock

	With square escutcheon plate Switching only possible if push button is depressed.	V400/A1	●	● ¹	●	●
	Switching only possible if push button has been depressed and released.				●	
	Up to 4 auxiliary contacts can be operated by depressing the push button.					
	With rectangular escutcheon plate Switching only possible if push button is depressed.	V400/B1	●	● ¹	●	●
	Switching only possible if push button has been depressed and released.				●	
Ordering data:	Number and operation of the auxiliary contacts.					


Electromechanical Interlock²

	For switches size S1 The electromechanical interlock locks the switch in any switching position. The interlock device is operated by energizing or de-energizing the electromechanical system. Adding auxiliary contacts to the switch permits the device to be operated only in pre-determined positions.	V140		●	●	●
	For switches size S2 and S3 or for switches size S1 with DC solenoid					
Ordering data:	Advise if the interlock is activated either by energizing or de-energizing of the electrical system. Coil voltage also required.					

Optional Extras		Code	For Switch Sizes				
			S00	S0	S1	S2	S3
Protective Cover							
 The protective cover prevents accidental contact with current-carrying terminals.	M160					C80 C125 C316 L400	C315 C316 L400
Ground and Neutral Terminal							
 Ground terminal Neutral terminal Ground and neutral terminal	H040/E		●				
	H040/N		●				
	H040/NE		●				
Tandem Drive							
 For 2 switch columns Two or three switch columns can be operated simultaneously. Special programs are available to reinforce the device for heavyduty applications. For 3 switch columns	M300/B			●	●	●	
	M300/C			●	●	●	
Bayonet/Switch Coupling							
 The device is used to couple switches into one column Switches of the same size Switches of different sizes For use on rear of switch To add some optional extras	M270			●	●	●	
	M275	●	●	●	●	●	
	P100			●	●	●	

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

Special Drives

    	Heavy duty drive unit The device is designed to allow customer to couple his own operating device to the switch.	G800/A	●			
	Heavy duty drive unit with actuator and roller	G800/B	●			
	Foot operation Available for spring return or stepping operation.	G900/A	●			
	Rope operation Available for spring return, maintained or stepping operation.	G900/B	●			
	Double action lever Available in white and electro-gray.	G800/C	●			

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

Spring Return over several Positions

	Spring return from both sides	M470/A	●	●	●	●
	Spring return from one side	M470	●	●	●	
Spring return for angular displacement up to 30° can be accomplished by using the latching mechanism only. If a large number of contacts must be opened simultaneously or a total angular displacement is larger than 30° over which the spring return is operational, the switch must use one of the spring return devices.						
Spring return from both sides can be designed to permit maintained position on each side of center.						
Ordering data:	For M470, specify spring return from either left or right side and details of maintained positions, if required.					

Uni-directional Interlock

	The uni-directional interlock prevents the switch from being operated counterclockwise. The interlock may be in either all positions or in pre-determined positions only.	M400	●	●	●	●				
	Ordering data: Specify which positions should be interlocked.									

Slip Clutch and Ratchet Coupling

	Slip clutch Using the slip clutch, two cam shafts can be coupled in such a way so that the secondary cam shaft will operate only after the primary cam shaft has been moved over a pre-determined angle. This slip clutch allows e. g. the de-energized changing back of switches for pole-changeable motors. Not available for D-switches.	M200	●	●						
	Ratchet coupling A ratchet coupling attaches to the rear of the switch. Additional stages are then attached behind the coupling device which serves to operate that portion of the switch only when the handle is turned counterclockwise. When the handle is turned clockwise, the rear switch portion remains in the same position.	M230			CA40 CA50 CA63					

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3


Electromechanical Trip Device (Undervoltage Release)¹


	Operating voltage and frequency:				
	AC/50 Hz	V350/A	●		
	AC/60 Hz	V350/B	●		
	AC/50/60 Hz	V350/C	●		
	DC	V350/D	●		
The device includes a magnetic system which releases the switch to the trip position at voltage failure or undervoltage of 70 % of the nominal voltage. The device is trip-free, in that the switch can be operated only when the primary voltage is available. When using DC voltage, an economy resistor must be provided. Switches with integrated undervoltage release are described on page 21.					
Ordering data:	Operating voltage and frequency for the magnetic system.				

Electromechanical Trip Device (Shunt-trip)¹

	The device permits the switch to be turned to the trip position by remote control. The coil is designed for short-time duty requiring an auxiliary contact in the switch which de-energizes the coil in the trip position. Controlling of the magnetic system: 24 V-440 V/50 Hz, 60 Hz or DC	V360/A	●		
	Ordering data:	Operating voltage for the magnetic system.			

Motor Drive¹

	The motor drive consists of an AC motor with condenser, gear train and Geneva gear. This device allows switches to be operated from a remote location. Motor voltages available are 220 V, 50 Hz and 117 V, 60 Hz. A technical data sheet pertaining to the possible control systems is available upon request.	R300	●	●	●
	Ordering data:				

Optional Extras		Code	For Switch Sizes			
			S00	S0	S1	S2
Key-lock Device with small Cylinder Lock or Micro-Kaba Lock						
	For 1 stage switches in PN enclosure	V750/		CA11		
	For 2 stage switches in PN enclosure			CA20		
	For 1 stage switches with plaster depth trim (With half-cylinder see page 17)			CA10- CA20		
				CA10		
	For base mounting with type of mounting VE21	V750D/		CA4 CG4		
	For single hole mounting combined with 16/22 mm, protection IP 66	V750D/2 ¹				
	With front ring (mounting FS1)			●		
	Escutcheon plate 30 x 30 mm (mounting FS2)			●		
	Escutcheon plate 30 x 39 mm (mounting FS4)		●			
	For single hole mounting 22 mm Protection IP 66	V750D/3				
	With front ring (mounting FT1)				●	
	Escutcheon plate 48 x 48 mm (mounting FT2)				●	
	Escutcheon plate 64 x 64 mm (mounting FH3)			●		
	Locking program in which the key can be removed:					
						
	For single hole mounting combined with 16/22 mm, Micro-Kaba lock Protection IP 66	V750D/1				
	With front ring (mounting FS1)			●		
	Escutcheon plate 30 x 30 mm (mounting FS2)			●		
	Escutcheon plate 30 x 39 mm (mounting FS4)		●			
	Locking program in which the key can be removed:					
						
Ordering data:		Locking program of the key.				

¹At high safety requirements use V750D/1. ²only for size S0

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

Key-lock Device with Kaba Lock

 For single hole mounting 25 mm With front ring (mounting EL)	V750D/	●			
 For four hole panel mounting Escutcheon plate 48 x 48 mm (mounting E) Escutcheon plate 64 x 64 mm (mounting EG) Escutcheon plate 48 x 60 mm (mounting E) Escutcheon plate 64 x 78,8 mm (mounting EG)	V750D/A V750D/A V750D/B V750D/B	● ● ● ●			
 For snap-on base mounting on track acc. to EN 50022 With escutcheon plate for 45 mm knock-out (mounting VE2)	V750D/	●			
 For snap-on base mounting on track acc. to EN 50022 With escutcheon plate for 46 mm knock-out (mounting VE3) Locking program in which the key can be removed: 1A 1B 1C 1D 1E 1F 1G 2G 2H 2J 2K 2L	V750D/	●			
Ordering data:	Locking program of the key.				

Key-lock Device with Profile Cylinder

 The key-lock device V750E with profile cylinder is furnished with a single hole mounting 22 mm for switches in size S0. The key can be removed in one switch position or for switches with 60° switching angle in up to six switch positions. The device with profile cylinder can be supplied with standard lock cylinders manufactured by CES, BKS or IKON.	V750E	●			
---	--------------	---	--	--	--

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

Key-lock Device with Kaba Lock

 For single hole mounting 40 mm Escutcheon plate 64 x 64 mm (mounting EL2) With front ring (mounting EL1) Key can only be removed in the 12 o'clock position. Central locking systems are available.	V750/A1	●	●		

Key-lock Device with Half-cylinder Lock

 For switches with plaster depth trim For 1 stage switches in standard flush mounting box For multiple staged switches in special flush mounting box Protection IP 42 The switch must have an arrested position in 12 o'clock. The key is only removable in the 12 o'clock position. The max. angular displacement is 2 x 135°.  Dust cap for key-lock device Protection IP 43  For panel mounting The key is removable in the 12 o'clock position. The max. angular displacement is 2 x 120°. Protection IP 42 Additional programs with key removable in 2 positions are available on request.	V755.UE1	BA20			
	S0D V755 12				
	V755.E	●			

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

Key Handle Device



	For four hole panel mounting and switches in enclosure Device	V900	●	●		
	Handle	V901	●	●		
	Key The device is designed similar to a cylinder lock. It can be programmed to remove the key or the handle only in one, in all or in pre-determined positions. A central lock system is available. Use of the device with switches in PN enclosure is possible only for switches type CA11B and CA20B with up to two stages.	V902	●	●		
Ordering data: Handle or key as operator. Advise position in which the operator is to be removed.						

Safety Key-lock Device with separate Drive

	For switches in enclosure Various key positions and locking programs are available. The key may be removed in locked and non-locked positions or in locked positions only. The different locking programs permit locking in one, all or in pre-determined switch positions.	V790		●		
Ordering data: Advise locking program and positions in which the key can be removed.						

Optional Extras	Code	For Switch Sizes			
		S0	S1	S2	S3

Safety-key-lock Device with separate Drive

	With small cylinder lock	V760/A.E	●●	●																															
	Square escutcheon plate																																		
	Rectangular escutcheon plate	V760/B.E	●●	●																															
	With commercial half-cylinder lock	V760/A	●	●	●	●																													
	Square escutcheon plate																																		
	Rectangular escutcheon plate	V760/B	●	●	●	●																													
	With half-cylinder lock	V765	●																																
	Square escutcheon plate																																		
	With dust cap Protection IP 43																																		
Various key positions and locking programs are available. Key positions: Key can be removed in locked and unlocked positions. Key can be removed only in locked positions. Locking programs:																																			
<table><tr><th rowspan="2">Locking Program No.</th><th rowspan="2">Switching Angle</th><th colspan="2">Switch Positions</th><th rowspan="2">Size</th></tr><tr><th>To be locked</th><th>Not to be locked</th></tr><tr><td>1</td><td>30°-90°</td><td>one</td><td>the balance</td><td>S0-S3</td></tr><tr><td rowspan="2">2</td><td>20°</td><td rowspan="2">all</td><td rowspan="2">none</td><td>S1, S3</td></tr><tr><td>30°-90°</td><td>S0-S3</td></tr><tr><td>3</td><td>30°-90°</td><td>the balance</td><td>one</td><td>S1-S3</td></tr><tr><td>4¹</td><td>30°-90°</td><td>one¹</td><td>the balance¹</td><td>S0-S3</td></tr></table>							Locking Program No.	Switching Angle	Switch Positions		Size	To be locked	Not to be locked	1	30°-90°	one	the balance	S0-S3	2	20°	all	none	S1, S3	30°-90°	S0-S3	3	30°-90°	the balance	one	S1-S3	4 ¹	30°-90°	one ¹	the balance ¹	S0-S3
Locking Program No.	Switching Angle	Switch Positions		Size																															
		To be locked	Not to be locked																																
1	30°-90°	one	the balance	S0-S3																															
2	20°	all	none	S1, S3																															
	30°-90°			S0-S3																															
3	30°-90°	the balance	one	S1-S3																															
4 ¹	30°-90°	one ¹	the balance ¹	S0-S3																															
¹ Locking program 4 permits the locking of the device in any switch position. However, the actual locking becomes effective in a pre-determined switch position only.																																			
Ordering data:		Advise locking program and positions in which the key can be removed.																																	

Optional Extras		Code	For Switch Sizes				
			S00	S0	S1	S2	S3
Padlock Device							
	For 1 padlock with lock bow diameter for 4-5,5 mm. The handle may be supplied in black and red.	V840K	●				
	The padlock is an integral part of the switch handle itself and can hold 2 padlocks The lock bar is accessible from the bottom. Handle can be sealed in the locked and unlocked positions. The handle may be supplied in black, red and electro-gray.	V840A		●	●		
	For mounting VE2 and VE21 with lock bar accessible from the front. Available in red and electro-gray.	V840B		●			
	For 4 padlocks The lock bar is accessible from the front and may be supplied in black, red and electro-gray.	V845		●	●	●	●
	Padlock device with integrated F- or B-handle The cover disc is available in black, yellow and electro-gray. The handle may be supplied in black, red and electro-gray.						
	For 2 padlocks With F-handle	V840D		●			
	For 3 padlocks With F-handle	V840G		●	●		
	With B-handle	V840D				●	
	For 4 padlocks With F-handle	V840G/B		●	●		
	With B-handle			●	●		
	For 2 padlocks For 3 padlocks For 6 padlocks Upon request, the device can be programmed to lock in several switch positions.	V840F/F V840F/B		●	●		
		V850		●	●	●	●
	Padlock device for C switches with base mounting for locking when control cabinet is opened. Padlock device with simplified door clutch and single hole mounting see page 6.	V840VE				●	
Ordering data:	Color variation.						

Switch Type Variations	Suffix Code	For Switch Sizes			
		S0	S1	S2	S3

PFR (Power Failure Release)¹



	Size S0 The magnetic system includes a low hum DC coil with incapsulated diode rectifier (blocking voltage 1000 V) = it, therefore, works independent of frequency. PFR switches are available with 24 V-600 V coils. Available switching detents: 1 x 60° (60° to the right of center OFF), 2 x 60° (60° to the right and left of center OFF), 1 x 60° + 30° (60° plus an additional 30° to the right of OFF).	X	CA10-CA20 CH10			
	Alternatively with trip-free release (Switching angle 1 x 60°) The PFR switch series is designed to provide protection for both machines and machine operators by preventing the equipment (which has been operating) from restarting automatically after a power failure. The device includes a magnetic system which releases the switch (by means of a linear spring return mechanism) to the trip position at voltage failure or undervoltage of 70 % of the nominal voltage.		CA10-CA20			
	Size S1 Operating voltage for the magnetic system: 24 V-500 V/50 Hz 24 V-600 V/60 Hz (Switching angle 1 x 60°)	X		A11 A14 CA40 ² CA50 ² CA63 ²		
Ordering data:	Operating voltage for size S0 as well operating voltage and frequency for size S1 for the magnetic system.					

Lockout-relay¹

	With manual release The lockout-relay is typically used to remotely switch electrical circuits from one power source to another. The device contains a totally incapsulated coil and linear spring return mechanism which is compressed by manually turning the handle to the ON position (60° to the right of OFF). Once in the ON position, the handle is mechanically locked in place and cannot be manually turned back to OFF. When the coil is energized, however, the unit will automatically spring return to the OFF position. A second version is available with push button manual release for test purposes. Controlling of the magnetic system: 24 V-500 V/50 Hz 24 V-600 V/60 Hz 24 V-125 V DC (magnetic system for voltages above 125 V DC on request) Without manual release	M	CA10 CG8 CH10- CHR16	A11 A14 CA40 ² CA50 ² CA63 ²		
						
Ordering data:	Operating voltage and frequency for the magnetic system.	L				

¹Ambient temperature: 35 °C during 24 hours with peaks up to 40 °C.

²In preparation.

Optional Extras		Code	For Switch Sizes				
			S00	S0	S1	S2	S3
Rectangular Add-on Escutcheon Plates							
Add-on escutcheon plates for switches with single hole mounting and four hole panel mounting The face plates can be engraved or embossed from the front or alternatively from the back. Face plates in different height are also available. The escutcheon plate frame is black, the face plate brushed aluminum. For switch sizes S0, S1, S2 and S3 yellow face plates are also available. Add-on escutcheon plates with black escutcheon plate frame, face plates brushed aluminum							
	Switches with single hole mounting 22 mm and front ring For front inscription For inscription on the back	F991/A0B/C-PRD F991/A0B-PRD	●	●			
			●	●			
	For front inscription For inscription on the back	F991/A0B/C-PRB F991/A0B-PRB	●	●			
			●	●			
	Switches with single hole mounting or four hole panel mounting 22 mm and square escutcheon plate For front inscription For inscription on the back	F991/A0B/C-PRC F991/A0B-PRC	●	●	●		
			●	●	●		
	For front inscription For inscription on the back	F991/A0B/C-PRA F991/A0B-PRA	●	●	●	●	●
			●	●	●	●	●
Face plates brushed aluminum							
	For front inscription For inscription on the back	F991/A00/C-P2B F991/A00-P2B	●	●	●		
			●	●	●		
	For front inscription For inscription on the back	F991/A00/C-P2A F991/A00-P2A	●	●	●	●	●
			●	●	●	●	●
Ordering data:	Color variation, if differing from the described version.						

Enclosures	Code	For Switch Sizes			
		S00	S0	S1	S2

Plastic Enclosures

	Enclosure series protection IP 66/67, made of strong durable plastic, increased wiring space and cover coupling														
	KS and KL series With high UV-resistance														
	CS and CL series For applications in an aggressive environment, such as oil, chemical substances and grease														
	Each enclosure has 2 knock-outs on top and bottom for metric thread according to EN 50262. Standard equipment includes both a ground and neutral terminal. Size S0 enclosures are also available with lateral conduit knock-out and a cover interlock which allows for opening without dismantling the handle. They can also be supplied with a cover locked in 1 position. These enclosures are also available for conduit entries for PG-thread.														
	The following switch types can be mounted: <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>CA4</td><td>3</td></tr><tr><td>CG4</td><td>2</td></tr><tr><td>CG6</td><td>2</td></tr></table>	Switch type	Max. no. of stages	CA4	3	CG4	2	CG6	2	KS3 CS3	● ●				
Switch type	Max. no. of stages														
CA4	3														
CG4	2														
CG6	2														
	Without cover interlock	KS50 CS50	● ●												
	With cover interlock (the enclosure can only be opened at 9 o'clock position)	KS51 CS51	● ●												
	With cover interlock (the enclosure can only be opened at 12 o'clock position)	KS52 CS52	● ●												
	The following switch types can be mounted: <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>CA10</td><td>6</td></tr><tr><td>CA11, CA20</td><td>5</td></tr><tr><td>CA25, CG8, CH10-CHR16</td><td>4</td></tr></table>	Switch type	Max. no. of stages	CA10	6	CA11, CA20	5	CA25, CG8, CH10-CHR16	4						
Switch type	Max. no. of stages														
CA10	6														
CA11, CA20	5														
CA25, CG8, CH10-CHR16	4														
	Without cover interlock	KL50 CL50	● ●												
	With cover interlock (the enclosure can only be opened at 9 o'clock position)	KL51 CL51	● ●												
	With cover interlock (the enclosure can only be opened at 12 o'clock position)	KL52 CL52	● ●												
	The following switch types can be mounted: <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>CA10</td><td>3</td></tr><tr><td>CA11</td><td>2</td></tr><tr><td>CA20, CA25, CG8</td><td>2</td></tr><tr><td>CH10-CHR16</td><td>2</td></tr></table>	Switch type	Max. no. of stages	CA10	3	CA11	2	CA20, CA25, CG8	2	CH10-CHR16	2				
Switch type	Max. no. of stages														
CA10	3														
CA11	2														
CA20, CA25, CG8	2														
CH10-CHR16	2														

Enclosures	Code	For Switch Sizes			
		S0	S1	S2	S3

Standard Enclosures

	Plastic Enclosures Protection IP 54																									
	With low cover	ST1 N100	CA40 CA50 CA63																							
	With high cover	ST1 N200	CA40 CA50 CA63	C80 C125																						
Enclosures are available with the following conduit entries which are arranged in top and bottom:																										
<table><tr><th>Code</th><th>Type of conduit entry</th></tr><tr><td>D</td><td>2 x PG29 + 1 x PG11</td></tr><tr><td>E</td><td>2 x PG21 + 1 x PG11</td></tr><tr><td>F</td><td>2 x PG16 + 1 x PG11</td></tr><tr><td>M</td><td>2 x 1" NPT</td></tr><tr><td>N</td><td>2 x 3/4" NPT</td></tr><tr><td>P</td><td>2 x 1/2" NPT</td></tr><tr><td>U</td><td>2 x ISO M20</td></tr><tr><td>V</td><td>2 x ISO M25</td></tr><tr><td>W</td><td>2 x 1" BSI</td></tr></table>						Code	Type of conduit entry	D	2 x PG29 + 1 x PG11	E	2 x PG21 + 1 x PG11	F	2 x PG16 + 1 x PG11	M	2 x 1" NPT	N	2 x 3/4" NPT	P	2 x 1/2" NPT	U	2 x ISO M20	V	2 x ISO M25	W	2 x 1" BSI	
Code	Type of conduit entry																									
D	2 x PG29 + 1 x PG11																									
E	2 x PG21 + 1 x PG11																									
F	2 x PG16 + 1 x PG11																									
M	2 x 1" NPT																									
N	2 x 3/4" NPT																									
P	2 x 1/2" NPT																									
U	2 x ISO M20																									
V	2 x ISO M25																									
W	2 x 1" BSI																									
Any one of a variety of switches with different amperage ratings and numbers of stages can be installed in the same type of enclosure. Different kits are, therefore, required to accomplish this.																										
Kits:																										
<table><tr><th>Switch type</th><th>No. of stages</th><th>Enclosures</th></tr><tr><td>CA40, CA50, CA63</td><td>1</td><td>ST1 N100</td></tr><tr><td>CA40, CA50, CA63</td><td>2</td><td>ST1 N200</td></tr><tr><td>CA40, CA50, CA63</td><td>3</td><td>ST1 N200</td></tr><tr><td>CA40, CA50, CA63</td><td>4</td><td>ST1 N200</td></tr><tr><td>C80</td><td>1 and 2</td><td>ST1 N200</td></tr><tr><td>C125</td><td>1</td><td>ST1 N200</td></tr></table>						Switch type	No. of stages	Enclosures	CA40, CA50, CA63	1	ST1 N100	CA40, CA50, CA63	2	ST1 N200	CA40, CA50, CA63	3	ST1 N200	CA40, CA50, CA63	4	ST1 N200	C80	1 and 2	ST1 N200	C125	1	ST1 N200
Switch type	No. of stages	Enclosures																								
CA40, CA50, CA63	1	ST1 N100																								
CA40, CA50, CA63	2	ST1 N200																								
CA40, CA50, CA63	3	ST1 N200																								
CA40, CA50, CA63	4	ST1 N200																								
C80	1 and 2	ST1 N200																								
C125	1	ST1 N200																								
ST1 A013A ST1 A013B ST1 A013A ST1 A013D ST1 A011B ST1 A011A																										
Ordering data:		Code for the type of conduit entries required.																								

Enclosures	Code	For Switch Sizes			
		S0	S1	S2	S3

Plastic Enclosures (Front Drive)

	Protection IP 65 Conduit entries with PG-thread Conduit entries with metric ISO-thread Conduit entries with NPT-thread Conduit entries with BSI-thread The following switch types can be mounted: <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>A11, A14</td><td>6</td></tr><tr><td>CA10, CA11, CA20, CA25, CA10B¹, CA11B, CA20B, CH10, CH16</td><td>4</td></tr><tr><td>CA40, CA50, CA63</td><td>6</td></tr></table>	Switch type	Max. no. of stages	A11, A14	6	CA10, CA11, CA20, CA25, CA10B ¹ , CA11B, CA20B, CH10, CH16	4	CA40, CA50, CA63	6	PF PF1 PF4 PF2 PF3	● ● ● CA10B CA11B CA20B CA40 CA50 CA63 ● ●		
Switch type	Max. no. of stages												
A11, A14	6												
CA10, CA11, CA20, CA25, CA10B ¹ , CA11B, CA20B, CH10, CH16	4												
CA40, CA50, CA63	6												
	Protection IP 42 Conduit entries with PG-thread Conduit entries with metric ISO-thread Conduit entries with NPT-thread Conduit entries with BSI-thread The following switch types can be mounted: <table><tr><th>Switch type</th><th>Max. no. of stages</th></tr><tr><td>A11, A14</td><td>6</td></tr><tr><td>CA10, CA11, CA20, CA25, CA10B¹, CA11B, CA20B, CH10, CH16</td><td>4</td></tr><tr><td>CA40, CA50, CA63</td><td>6</td></tr></table>	Switch type	Max. no. of stages	A11, A14	6	CA10, CA11, CA20, CA25, CA10B ¹ , CA11B, CA20B, CH10, CH16	4	CA40, CA50, CA63	6	PN PN1 PN4 PN2 PN3	● ● ● CA10B CA11B CA20 CA40 CA50 CA63 ● ●		
Switch type	Max. no. of stages												
A11, A14	6												
CA10, CA11, CA20, CA25, CA10B ¹ , CA11B, CA20B, CH10, CH16	4												
CA40, CA50, CA63	6												
	A lamp can be installed on request.												

¹Only for 4 stages.

Enclosures	Code	For Switch Sizes			
		S0	S1	S2	S3

Plastic Enclosures (Lateral Drive)

Protection IP 44

Conduit entries with PG-thread

Conduit entries with metric ISO-thread

Conduit entries with NPT-thread

Conduit entries with BSI-thread

Conduit entries without thread

PK

PK1

PK2

PK3

PK9

The following switch types can be mounted:

Switch type	Max. no. of stages
A11	12
CA10, CA10R	12
CA11, CA20, CAD11, CAD12	12
CA10B, CA11B, CA20B	12

Aluminum Enclosures

Protection IP 65

Conduit entries with PG-thread

Conduit entries with metric ISO-thread

Without conduit entries

GK

GK1

GK9

The following switch types can be mounted:

Switch type	Max. no. of stages
A11, A14	10
CA10, CA10R	3
CA11	2
CA20	2
CA10B	12
CA11B	10
CA20B	10
CA25B	9
CA40, CA50, CA63	10


Additional conduit entries on request.

Optional Extras

Dimensions mm
inch

Shaft Extension

L100, L100A




L1 = Free shaft length

Size	L1	L1	L1	L1	L1	L1	L1	L1	L1
S0, S1	19 .75	23 .91	27 1.06	32 1.26	37 1.46	42 1.65	47 1.85	52 2.05	57 2.24
S0, S1	62 2.44	67 2.64	72 2.83	77 3.03	82 3.23	87 3.43	92 3.62	97 3.82	102 4.02

Size	D
S0	13.8 .54
S1	18.5 .73

M004D, M004E




L = Shaft length

L1 = Free shaft length max.


¹ = Only for square shaft

M004, M004A



Size	L ¹	L1 ¹	L	L1	L	L1	L	L1	L	L1	D1	D2	A	SW
S0			60 2.36	40 1.57	80 3.15	60 2.36	100 3.94	80 3.15	120 4.72	100 3.94	6 .24	13.8 .54		12 .47
S1	56.5 2.22	20 .79	70 2.76	40 1.57	90 3.54	60 2.36	110 4.33	80 3.15	130 5.12	100 3.94	8.5 .34	18.5 .73	6 .24	16 .63
S2	70 2.76	40 1.57	100 3.94	70 2.76	130 5.12	100 3.94	160 6.30	130 5.12	190 7.48	160 6.30	11.2 .44	24.6 .97	8 .32	22 .87
S3	95 3.74	40 1.57	130 5.12	75 2.95	165 6.50	110 4.33	200 7.87	145 5.71	235 9.25	180 7.09	14 .55	35.1 1.38	10 .39	39 1.18

Control and Indicator Device without Lamps

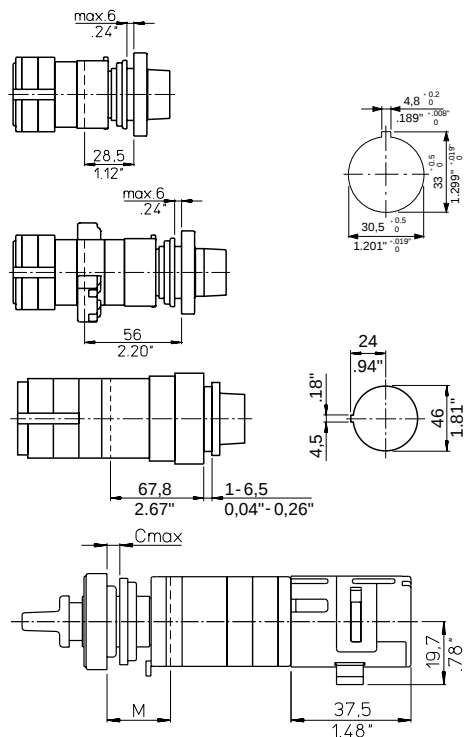

Q110

Escutcheon plates

48,0 x 48,0 mm

48,0 x 60,0 mm

64,0 x 64,0 mm

64,0 x 79,0 mm





Q110/F

Q100/A

Escutcheon plate

51,8 x 51,8 mm

Q100B



Without interlock

M = 17,7 C = 5

.70 .20

With interlock





M = 19,5 C = 6,5

.77 .26

Dimensions

Dimensions

Simplified Door Clutch

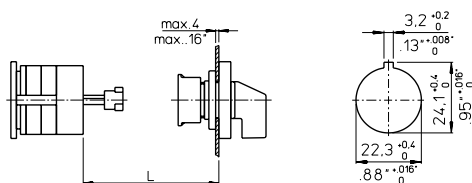

M290/A1

L = Shaft length at (number of profile extension parts)

Size	L (0)		L (1)		L (2)		L (3)		L (4)		L (5)		L (6)		D1
S0	10	15	15	20	20	25	25	40	40	55	55	70	70	85	78
	.39	.59	.59	.79	.79	.98	.98	1.57	1.57	2.17	2.17	2.76	2.76	3.35	.11
S1	10	15	25	30	40	45									18
	.39	.59	.98	1.18	1.57	1.77									.71
S2, S3	36	51	51	66	66	71	71	86	86	91	91	106			45
	1.42	2.01	2.01	2.60	2.60	2.80	2.80	3.39	3.39	3.58	3.58	4.17			1.77

M290/A1.EF

L = Shaft length at (number of profile extension parts)

Size	L (0)	L (1)	L (2)	L (3)	L (4)	L (5)	L (6)	D1
S0	9 14 .35 .55	14 19 .55 .75	19 24 .75 .94	24 39 .94 1.54	39 54 1.54 2.13	54 69 2.13 2.72	69 84 2.72 3.31	84 2.87
S1	9 14 .35 .55	14 19 .55 .75	19 24 .75 .94	24 39 .94 1.54	39 54 1.54 2.13	54 69 2.13 2.72	69 84 2.72 3.31	45.6 1.80
S2	31 40 1.22 1.57	38.5 47.5 1.52 1.87	46 55 1.81 2.17	53.5 62.5 2.11 2.46	61 70 2.40 2.76			45.6 1.80

M290/A3, M290/A3.EF



L = Shaft length

Size	L		L		L		L		L				D1
S0	37 1.46	57 2.24	57 2.24	77 3.03	77 3.03	97 3.82	97 3.82	117 4.61					18 .71
S1	28 1.10	55 2.17	55 2.17	75 2.95	75 2.95	95 3.74	95 3.74	115 4.53					18 .71
S2	40 1.57	65 2.56	65 2.56	95 3.74	95 3.74	125 4.92	125 4.92	155 6.10	185 7.28				45 1.77
S3	45 1.77	65 2.56	65 2.56	100 3.94	100 3.94	135 5.31	135 5.31	170 6.69	205 8.07				45 1.77


¹For S0 M290/A3.EF: 22/.87, for S1 M290/A3.EF/1: 45,6/1.80

M295

M295		L	
		min.	max.
M295/A	S0/S1	27 1.06	112 4.41
M295/B	S0/S1	25 .98	90 3.54

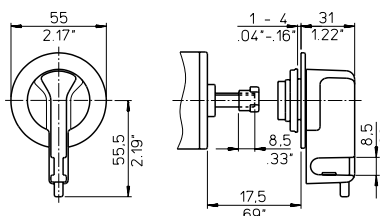
V840E

V840F/V840G




Size	L	
	min.	max.
S0	30 1.18	55 2.17
S1	28 1.10	55 2.17

V845



Size	A	H	L	
			min.	max.
S0	48 1.89	52 2.05	30 1.18	55 2.17
S1	64 2.52	58 2.28	28 1.10	55 2.17

M600

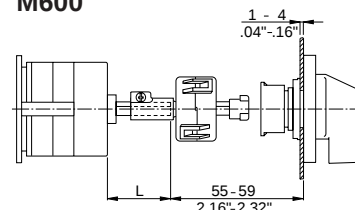


L see L100, M004D, M004, page 27.

Auxiliary Contacts


M510B

E mounting




Size	M	D
S1	16 .63	64 2.52
S2	18,7 .74	84 3.31
S3	17 .67	128 5.04

VE mounting

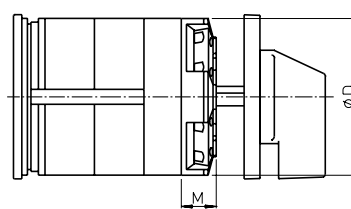

Size	M	D
S1	11,5 .45	64 2.52
S2	11,7 .46	84 3.31
S3	8 31	128 5.04

Standard Door Clutch

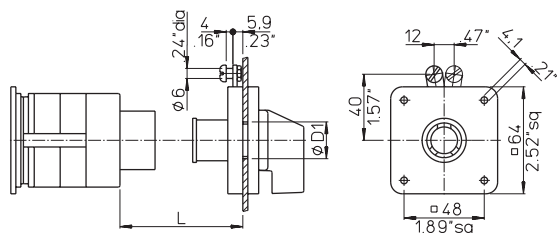


M280, M280/EF


For switches of size S1

L = Shaft length

Size	L		L		L		L		L		L		D1
S1	34	49	49	64	64	79	79	94	94	109	109	124	19-22 .75-.87
S2	40	55	55	70	70	85	85	100	100	115	115	130	26-30 1.02-1.18
S3	40	55	55	70	70	85	85	100	100	115	115	130	26-30 1.02-1.18

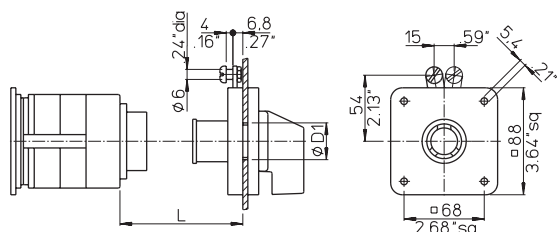


For switches of size S2 and S3

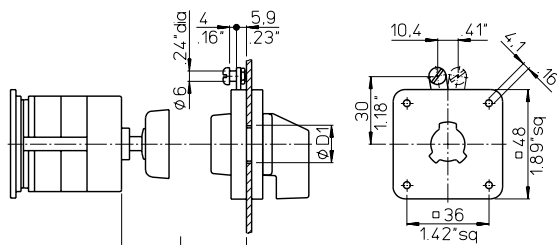


M280D, M280D/EF, M280E, M280E/EF

For switches of size S0

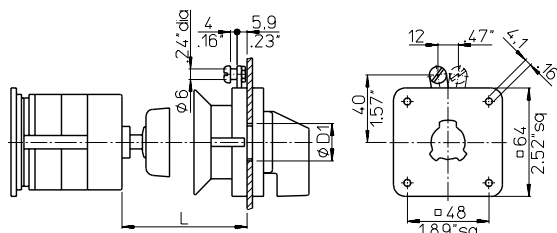

For switches of size S1 and S0

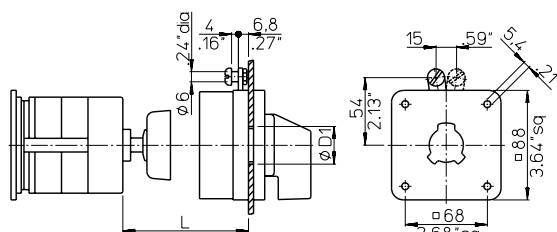


For switches of size S2 and S3


L = Shaft length

Size	L		L		L		L		D1
S0	36	55	56	75	76	95	96	116	18-22 .71-.87
S0	36	55	56	75	76	95	96	116	19-22 .75-.87
S1	32	57	58	77	78	97	98	118	19-22 .75-.87
S2	60	90	90	120	120	150	150	180	26-30 1.02-1.18
S3	60	95	95	130	130	165	165	200	26-30 1.02-1.18

M700

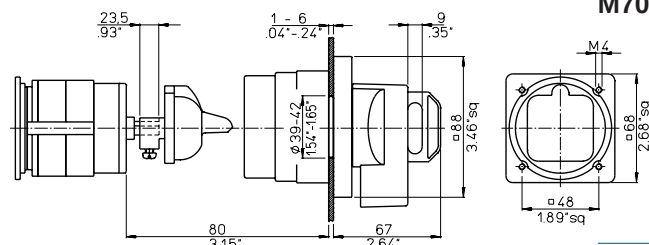


M701

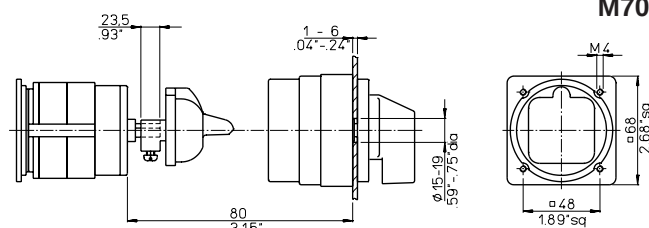


Indicator Lamp Device

Q200/A1, Q200/A2, Q200/B1, Q200/B2


For switches of size S0

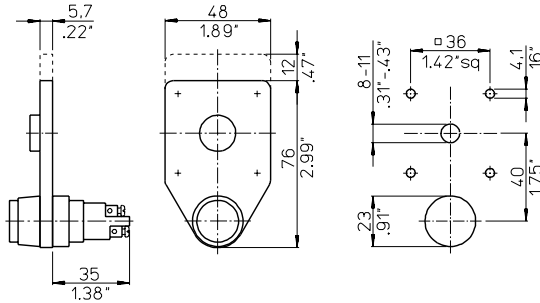


For switches of size S1

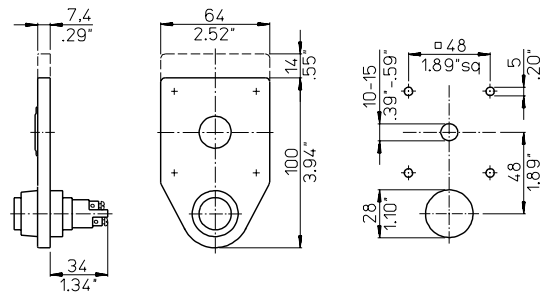

For switches of size S2

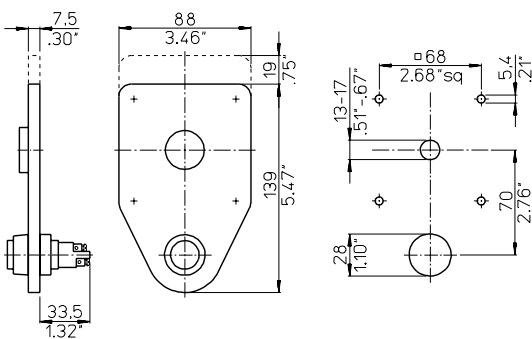


For switches of size S3

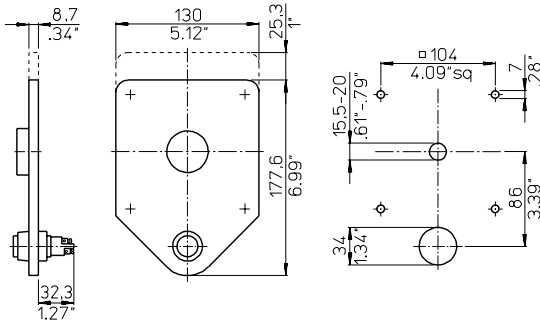


Stop and Go Device

V160



Spring Return over several Positions

M470/A, M470




Size	M470/A M	M470 M
S0 ●	33,3 1.31	33,3 1.31
S0 ¹ ●	40,3 1.59	29,2 1.15
S1 ¹	33,3 1.31	22,2 .87
S2	75 2.95	

¹shaft hole 18,5 mm/.73 inch


Push-pull Interlock

V110A, V115A, V130A, V135A

E, EG



FT2, FH3




M = Additional length of the switch

Mounting	E ¹		EG ²		FT2		FH3	
	V110A V130A	V115A V135A	V110A V130A	V115A V135A	V110A V130A	V115A V135A	V110A V130A	V115A V135A
M w/o a/c	17,5 .69	33,5 1.32	24,5 .96	40,5 1.59	24,0 .94	40,0 1.57	31,0 1.22	47,0 1.85
M with a/c	33,5 1.32	33,5 1.32	40,5 1.59	40,5 1.59	40,0 1.57	40,0 1.57	47,0 1.85	47,0 1.85
S	1-4 .04-.16	1-4 .04-.16	1-4 .04-.16	1-2 .04-.08	1-6 .04-.24	1-6 .04-.24	1-6 .04-.24	1-6 .04-.24

¹shaft hole 15-19 mm/.59-.75 inch²shaft hole 19-22 mm/.75-.87 inch

V110, V115, V130, V135

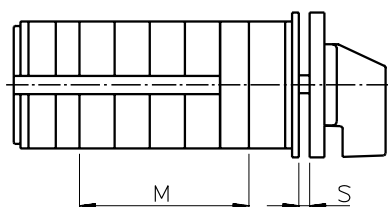


M = Additional length of the switch

Size	No. of auxiliary contacts				S
	0-2	3+4	5+6	7+8	
S1 ¹	39,9 1.57	57,4 2.26	74,9 2.95	92,4 3.64	0-4 0-.16
S1	29,5 1.16	47 1.85	64,5 2.54	82 3.23	0-4 0-.16

¹For switch type CA..B, CH..B, CG..B, DH..B

V110, V120, V130

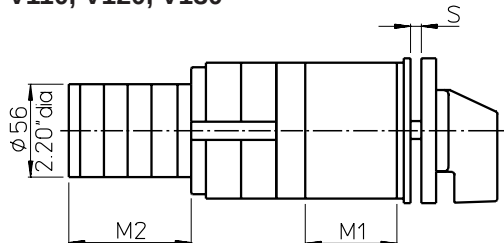

M1 = Additional length of the switch



M2 = Additional length of the auxiliary switch

Size	No. of auxiliary contacts					S
	0	1+2	3+4	5+6	7+8	
S1 ¹	51,7 2.04	101,4 3.99	120,4 4.74	139,4 5.49	158,4 6.24	0-4,5 0-.18
S2	69 2.72	127,6 5.02	146,6 5.77	165,6 6.52	184,6 7.27	0-5,5 0-.22
S3	85 3.35	151,6 5.96	170,5 6.71	189,5 7.46	208,5 8.21	0-7 0-.28

¹Only for V120

Interlock between Switches and Tandem Drive


V600/B, V600/C, M300/B, M300/C

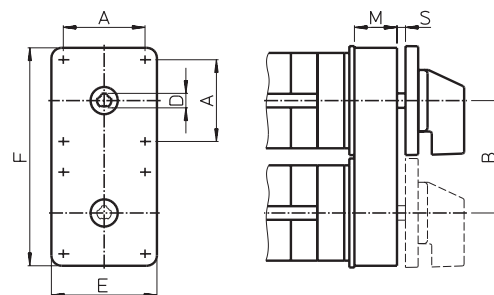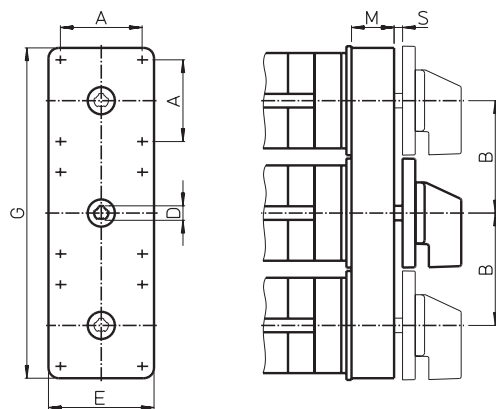

Size	A	B	D	E	F	G	M	S
S1	48 1.89	66 2.60	8,5 .34	62 2.44	128 5.04	194 7.64	25 .98	1,4-4,5 .06-.18
S2	68 2.68	93 3.66	11,2 .44	92 3.62	183 7.20	276 10.87	30 1.18	1,5-7,0 .06-.28
S3	88 3.46	144 5.67	14 .55	130 5.13	274 10.79	418 16.48	24 .94	1,5-8,3 .06-.33


Push Button Interlock

V400/A1, V400/A2, V400/B1, V400/B2

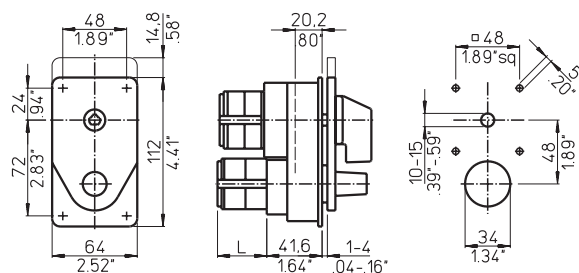


For switches of size S0 and S1

	No. of auxiliary contacts	
	2	4
L	24,5 .96	42 1.65

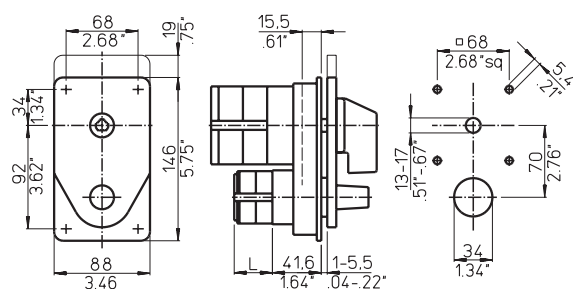


For switches of size S2

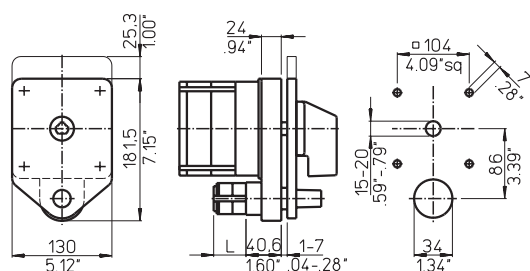

For switches of size S3

Electromechanical Interlock

V140

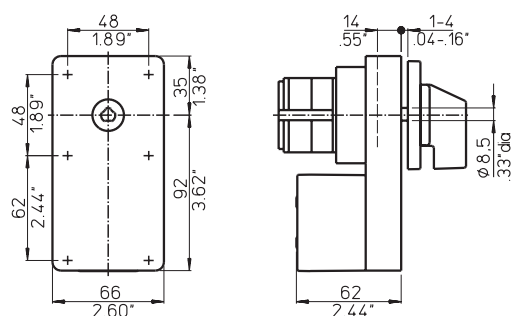


For switches of size S1

For switches of size S1, S2 and S3

M1 = Additional length for the interlock
M2 = Additional length for the coupling pieces of the solenoid
Additional length for the solenoid upon request.

Size	M1 + M2	S
S1	56 2.20	0-4 0-16
S2	102 4.02	0-5.5 0-22
S3	111.1 4.37	0-7 0-28

Bayonet/Switch Coupling

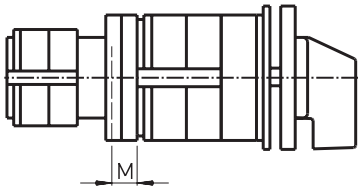


M270

Size	Coupled switch		
	S1	S2	S3
Main switch	M	M	M
S1	9,8 .39		
S2		12,9 .51	
S3			32,9 1.30

M275


Size	Coupled switch			
	S00	S0	S1	S2
Main switch	M	M	M	M
S0		5,5 .22		
S1	1,3 .05	0,8 .03		
S2	10,2 .40	4,4 .17	2,9 .11	
S3	12,7 .50	12,2 .48	11,4 .45	11,4 .45



P100

Size	M
S1	14,3 .56
S2	19 .75
S3	35,4 1.39


Slip Clutch and Ratchet Coupling



M200, M230

M = One switch stage


Electromechanical Trip Device (Undervoltage Release and Shunt-trip)

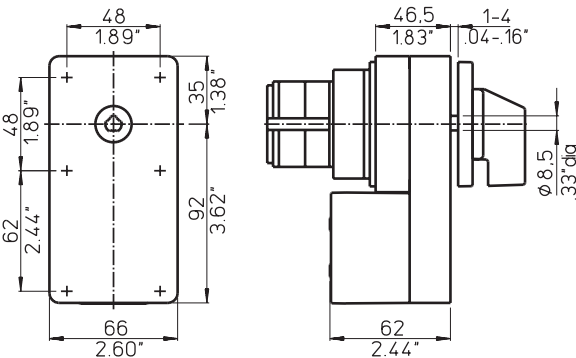


V350/A, V350/B, V350/D
V360/A, V360/B, V360/D

Special Drive Units


G800/A

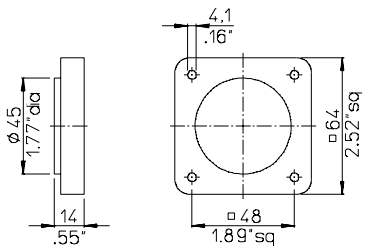


G800/B

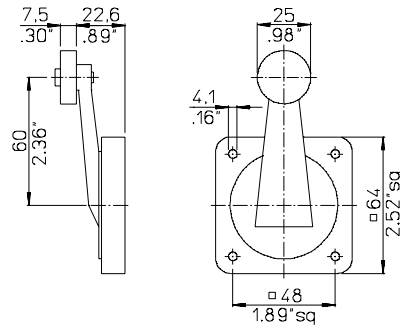


G900/A

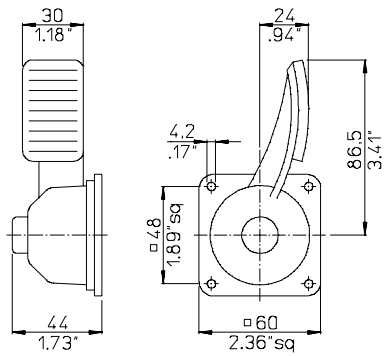

G900/B

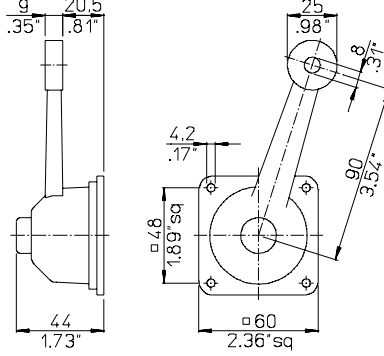


G800/C




Ground and Neutral Terminal

H040/E, H040/N, H040/NE




Motor Drive

R300

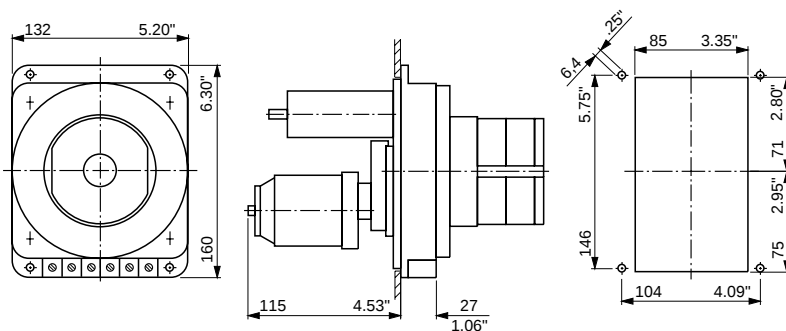


Key-lock Device with small Cylinder Lock

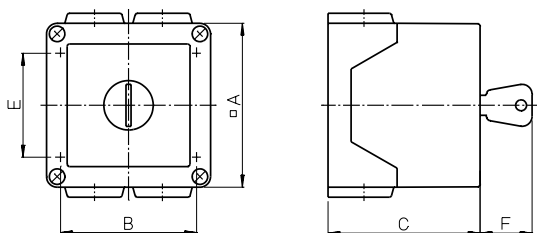


V750


Switch type	No. of stages	A	B	C	E	F	Conduit entries 4 x			
							PG	ISO	NPT	BSI
CA10	2	64 2.52	50 1.97	68,8 2.71	36 1.42	26 1.02	11	20	-	-
CA11, CA20	1 + 2	82 3.23	68 2.68	75,5 2.97	52 2.05	29 1.14	16	20	1/2"	3/4"

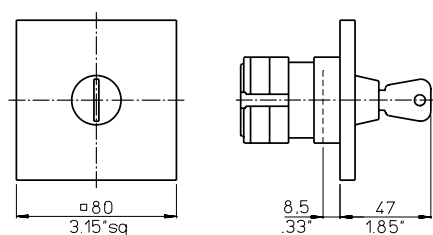

For 1 stage CA10 switches with plaster depth trim

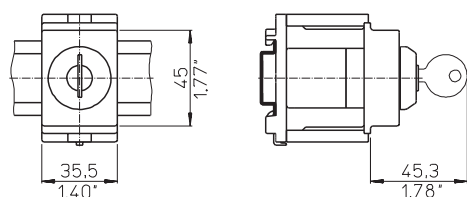

For base mounting with type of mounting VE21

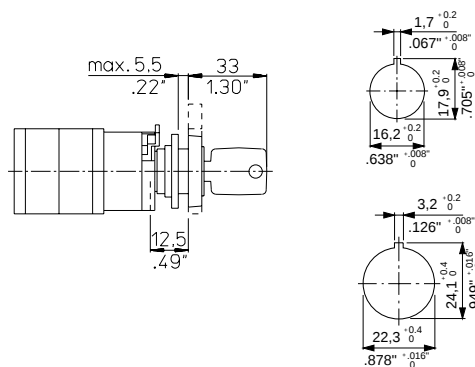

V750D/1 and V750D/2


For single hole mounting combined with 16/22 mm

Front ring 29,5 mm Ø (mounting FS1)

Escutcheon plates

30 x 30 mm (mounting FS2)

30 x 39 mm (mounting FS4)

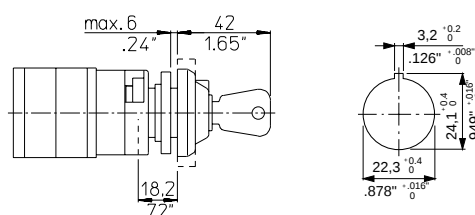

V750D/3

For single hole mounting 22 mm


Front ring 39 mm Ø (mounting FT1)

Escutcheon plate

48 x 48 mm (mounting FT2)

64 x 64 mm (mounting FH3)

Key-lock Device with Kaba Lock

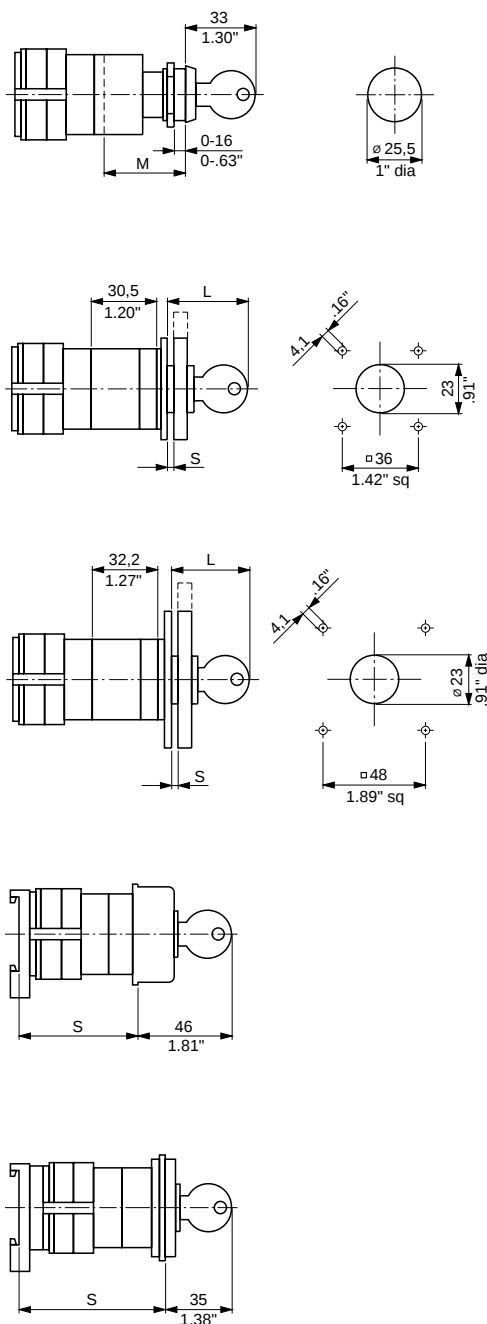

V750D

With front ring (mounting EL)

Locking program	M
1A-1G	37,2 1.46
2G-2L	47,2 1.86

V750D/A, V750D/B

Escutcheon plates

48 x 48 mm (mounting E)

48 x 60 mm (mounting E)

Locking program	S	L
1A-1G	1-3,5 .04-.14	40,3 1.59
2G-2L	1-12,5 .04-.49	49,3 1.94

V750D/A, V750D/B

Escutcheon plates

64 x 64 mm (mounting EG)

64 x 78,8 mm (mounting EG)

Locking program	S	L
1A-1G	1-3,5 .04-.14	39,8 1.57
2G-2L	1-12,5 .04-.49	48,8 1.92


V750D (mounting VE2)

Max. no. of stages	CA10	CA11	CA20	CG8	CH10
S = 50 mm 1.97"	1	-	-	-	-
61 mm 2.40"	2	1	1	1	1
67 mm 2.64"	-	2	2	-	-
69 mm 2.72"	3	2	2	-	-


V750D (mounting VE3)

Max. no. of stages	CA10	CA11	CA20	CG8
S = 67 mm 2.64"	1	1	1	-
69 mm 2.72"	1	1	1	1

Key-lock Device with Profile Cylinder

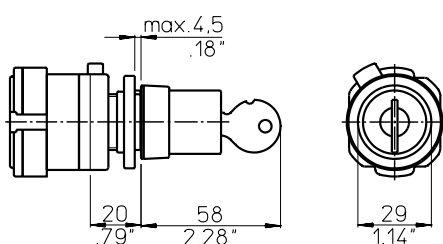


V750E



Optional Extras

Dimensions mm
inch

Key-lock Device with Kaba Lock

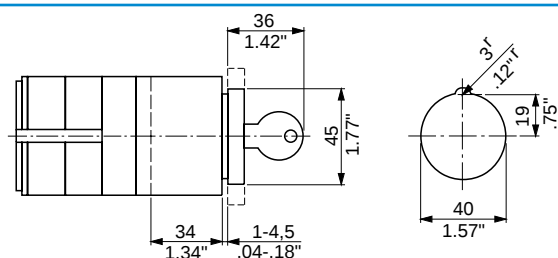


V750/A1


With escutcheon plate 64 x 64 mm (mounting EL2)
With front ring (mounting EL1)

Key-lock Device with Half-cylinder Lock


V755.UE1

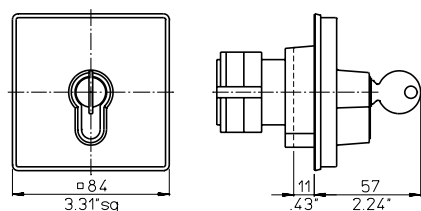


V755.E

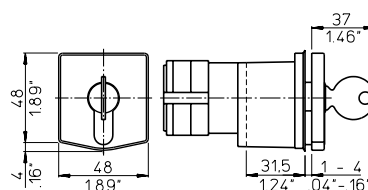

Different drilling plans

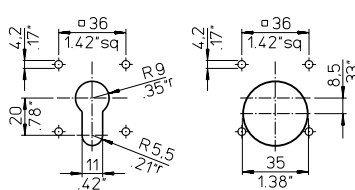


Key Handle Device

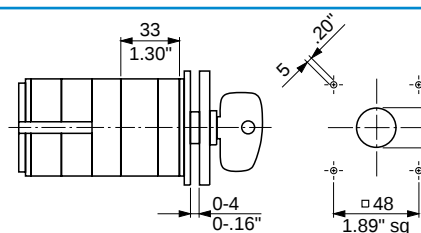

V900


Safety Key-lock Device with separate Drive

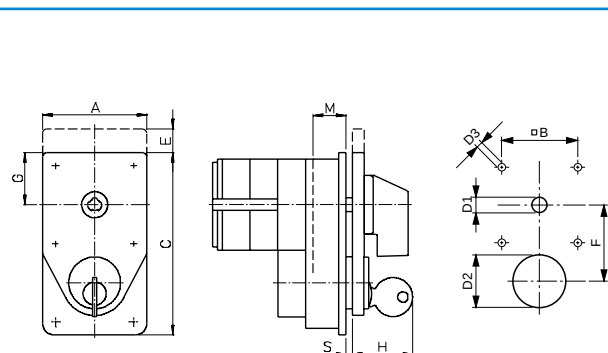


V760/A.E, V760/B.E, V760/A, V760/B

Size of the optional extra	A	B	C	E	F	G
S0	48 1.89	36 1.42	82 3.23	12 .47	40 1.57	24 .94
S1	64 2.52	48 1.89	112 4.41	14.8 .58	48 1.89	32 1.26
S2	88 3.46	68 2.68	146 5.75	19 .75	70 2.76	44 1.73
S3	130 5.12	104 4.09	181.5 7.15	25.3 1.00	86 3.39	65 2.56
	H	D1	D2	D3	M	S
S0	31 1.22	8.5 .33	20 .79	5 .20	9.5 .37	1-4 .04-.16
S1	34.5 1.36	10 .39	34 1.34	5 .20	20.2 .80	1-4 .04-.16
S2	35.5 1.40	12 .47	34 1.34	5.4 .21	15.5 .61	1-5.5 .04-.22
S3	36.5 1.44	15 .59	34 1.34	7 .28	24 .94	1-7 .04-.28


V765

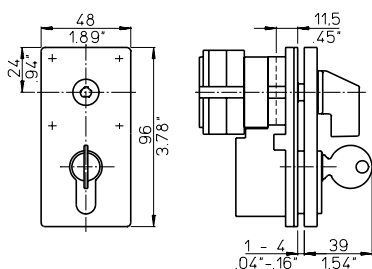


Different drilling plans

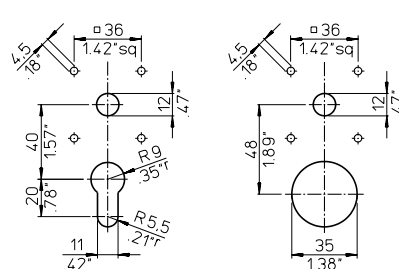

V790



Padlock Device

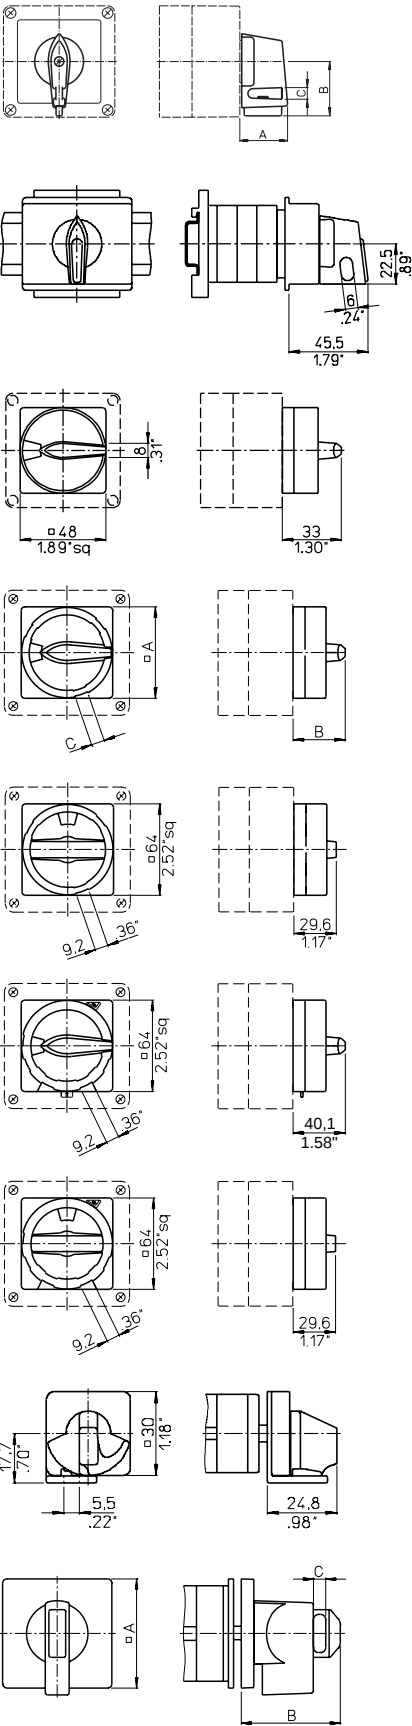

V840A

For 2 padlocks

Size	A	B	C
S0	27.7 1.07	31.5 1.24	5 .20
S1	35 1.38	40 1.57	7 .28

V840B

For 2 padlocks

V840D

For 2 padlocks

V840G, V840D

For 3 padlocks

	A	B	C
V840G	64 2.52	40.1 1.58	9.2 .36
V840D	88 3.46	49.3 1.94	10 .39

V840G/B

For 3 padlocks

V840F/F

For 4 padlocks

V840F/B

For 4 padlocks





V840K

For 1 padlock



V845

Size	A	B	C
S0	48 1.89	51 2.01	7.2 .28
S1	64 2.52	58 2.28	8.1 .32
S2	88 3.46	73 2.87	9 .35
S3	130 5.12	86.5 3.41	9 .35

Padlock Device

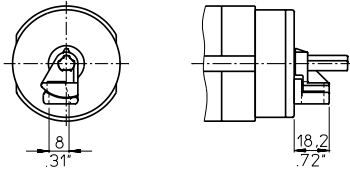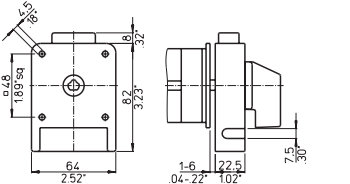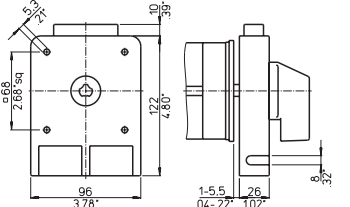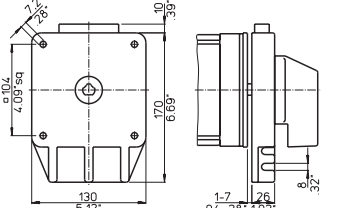	V840VE
	V850
For 2 padlocks	
	For 3 padlocks
	For 6 padlocks


PFR (Power Failure Release)

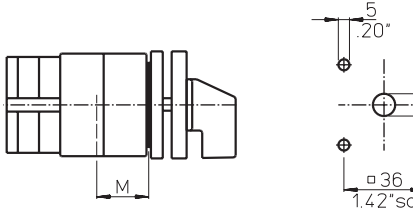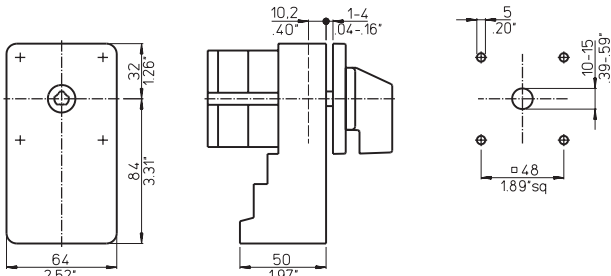	Size S0
Without trip-free release	M 23.3 .92
With trip-free release	31.5 1.24
	Size S1

Optional Extras


Dimensions mm
inch

Additional Screw Terminal for CL Switches



	A
CL4	7,8 .31
CL10	10,8 .43

Lockout-relays

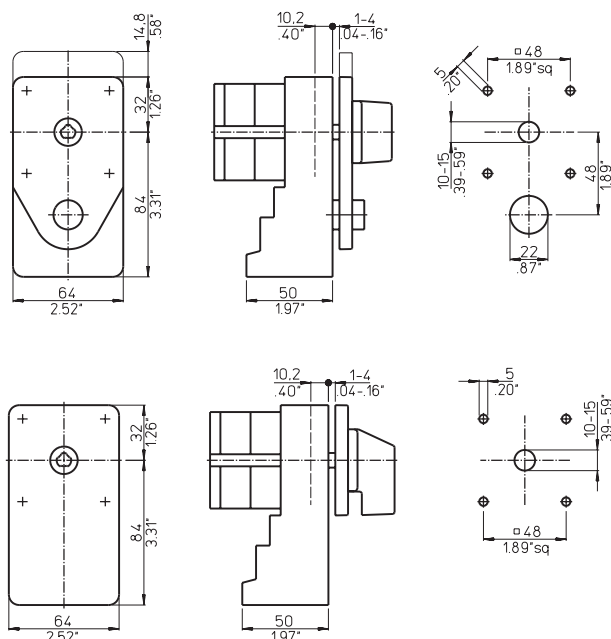


With manual release


Without manual release

Rectangular Add-on Escutcheon Plates

PRA




PRB




F991/...-..., F991/.../C-...

	PRA					PRB	
	S00	S0	S1	S2	S3	S00	S0
A	29,5 1.16	47,8 1.88	63,8 2.51	87,8 3.46	129,8 5.11	29,5 1.16	47,8 1.88
B	35 1.38	48 1.89	60 2.36	80 3.15	115 4.53	35 1.38	48 1.89
C	4 .16	4 .16	5 .20	6 .24	7 .28	4 .16	4 .16
M	0,7 .03	0,7 .03	0,8 .03	1 .04	1,2 .05	0,7 .03	0,7 .03

PRC




PRD




	PRC			PRD	
	S00	S0	S1	S00	S0
A	29,5 1.16	47,8 1.88	63,8 2.51	29,5 1.16	47,8 1.88
B	25,5 .98	36 1.42	47 1.85	25,5 .98	36 1.42
C	4 .16	4 .16	5 .20	4 .16	4 .16
M	0,7 .03	0,7 .03	0,8 .03	0,7 .03	0,7 .03

Plastic Enclosures (Front Drive)

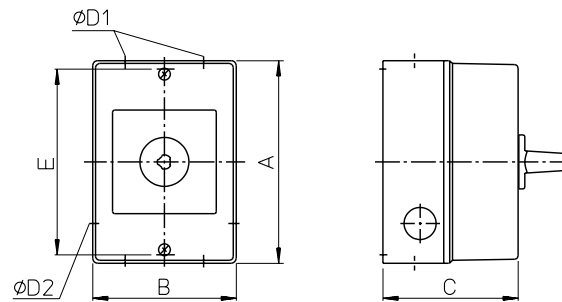


Mounting	Switch type	Max. no. of stages	A	B	C	Conduit entries		
						4 x D1	2 x D2	E
KS3 CS3	CA4	2	90	70	60	16	-	82
	CG4	1	3.54	2.76	2.36	.63	-	3.23
	CA4	3						
	CG4	2	90	70	77	16	-	82
KS50, KS51, KS52 CS50, CS51, CS52	CG6	2	3.54	2.76	3.03	.63	-	3.23
	CA10	4						
	CA11	3						
	CA20, CA25, CG8	2	120	85	80	20	20	110
	CH10-CHR16	2	4.72	3.35	3.15	.79	.79	4.33
	CA10	6						
KL50, KL51, KL52 CL50, CL51, CL52	CA11, CA20	5	120	85	106	20	20	110
	CA25, CG8, CH10-CHR16	4	4.72	3.35	4.17	.79	.79	4.33
	CA10	3						
	CA11, CA20, CA25, CG8	2	160	85	80	20	20	150
	CH10-CHR16	2	6.30	3.35	3.15	.79	.79	5.91



Standard Enclosures







ST1N100



ST1N200

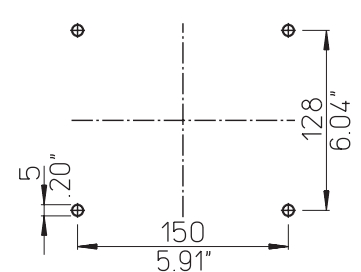

Plastic Enclosures (Front Drive)

For switch type
CA10For switch type
CA11, CA20, CA10B,
CA11B, CA20B, CH10,
CH16, CA25For switch type
A11, A14, CA40, CA50,
CA63




Switch type	No. of stages	PN.	PF.	Conduit entries 4 x			
		C	C	PG	ISO	NPT	BSI
A11, A14	1	67,5 2.66	73 2.87	21	-	3/4"	1"
	2 + 3	89 3.50	94,5 3.72				
	4-6	132 5.20	137,5 5.41				
CA10	1	36,6 1.43	41,3 1.63	11	M20	-	-
	2	45,8 1.80	50,8 2.00				
	3	55,3 2.18	60,3 2.37				
	4	64,8 2.55	69,8 2.75				
CA11, CA20, CA11B, CA20B	1 + 2	59,7 2.35	64,7 2.55	16	M20	1/2"	3/4"
CA11, CA20, CA10B, CA11B, CA20B	3 + 4 ¹	85,1 3.35	90,1 3.55	16	M20	1/2"	3/4"
CH10, CH16	1	59,7 2.35	64,7 2.55	16	M20	1/2"	3/4"
	2 + 3	85,1 3.35	90,1 3.55				
	4	93 3.66	98 3.86				
CA25	1 + 2	59,7 2.35	64,7 2.55	16	M20	1/2"	3/4"
	3	85,1 3.35	90,1 3.55				
	4	93 3.66	98 3.86				
CA40, CA50, CA63	1	67,5 2.66	73 2.87	21	M25	3/4"	1"
	2 + 3	89 3.50	94,5 3.72				
	4 - 6	132 5.20	137,5 5.41				

¹CA10B only for 4 stages

Enclosures



Dimensions mm
inch

Plastic Enclosures (Lateral Drive)



Switch type	Max. no. of stages	A	B	C	E	F	G	Conduit entries					
								Z1	Z3	PG	ISO	NPT	BSI
CA10, CA10R, CAD11, CAD12, CA10B A11, CA11, CA20, CA11B, CA20B	4 3	92 3.62	90 3.54	75 2.95	80 3.15	68 2.68	12 .47	●	-	16	M25	3/4"	3/4"
CA10, CA10R, CAD11, CAD12 CA10B A11, CA11, CA20, CA11B, CA20B	7 6 5	115 4.53	90 3.54	75 2.95	80 3.15	91 3.58	12 .47	-	●	16	M25	3/4"	3/4"
CA10, CA10R, CAD11, CAD12 CA10B A11, CA11, CA20, CA11B, CA20B	10 9 7	140 5.51	90 3.54	75 2.95	80 3.15	116 4.57	12 .47	-	●	16	M25	3/4"	3/4"
CA10, CA10R, CAD11, CAD12, CA10B A11, CA11, CA20, CA11B, CA20B	12 9	165 6.50	90 3.54	75 2.95	80 3.15	141 5.55	12 .47	-	●	16	M25	3/4"	3/4"
A11, CA11, CA20, CA11B, CA20B	11	190 7.48	90 3.54	75 2.95	80 3.15	166 6.54	12 .47	-	●	16	M25	3/4"	3/4"
A11, CA11, CA20, CA11B, CA20B	12	215 8.46	90 3.54	75 2.95	80 3.15	191 7.52	12 .47	-	●	16	M25	3/4"	3/4"

Aluminum Enclosures



Switch types	No. of stages	A	B	C	E	F	F1	Conduit entries			
								Z1	Z2	PG	ISO
CA10, CA10R CA11, CA20	3 2	80 3.15	75 2.95	57 2.24	63 2.48	-	52 2.05	●	-	13,5	M20
CA10B CA11B, CA20B CA25B	4 3 2	100 3.94	100 3.94	80 3.15	86 3.39	66 2.60	-	●	-	16	M20
A11, A14 CA10B CA11B CA20B, CA25B CA40, CA50, CA63	5 7 6 5 5	140 5.51	140 5.51	90 3.54	120 4.72	93 3.66	-	●	-	21	M25
A11, A14 CA10B CA11B, CA20B CA25B CA40, CA50, CA63	10 12 10 9 10	200 7.87	140 5.51	90 3.54	93 3.66	180 7.09	-	-	●	21	M25

The Range of “Blue Line” Switchgear

Technical literature covering the following products is available on request.

	Catalog Number
Main Switches and Main Switches with Emergency Function 16 A-315 A Maintenance Switches 20 A-315 A Switch Disconnectors 20 A-315 A According to IEC 60947-3, EN 60947-3, VDE 0660 part 107, IEC 60204, EN 60204 and VDE 0113	500
CL Switches 10 A-20 A C, CA and CAD Switches 10 A-315 A and L Switches 350 A-2400 A C, CA and CAD switches are designed for universal application. They are recommended for instrument, isolator, double-throw and motor control. L switches are designed for load and off-load applications. They are used to switch resistive or low inductive loads.	100
Optional Extras and Enclosures The complete product line, a large number of optional extras is available, including door interlocks, push-pull devices, cylinder and padlock attachments, control and indicator devices, AC motor drives, as well as enclosures, both insulated and metal.	101
A and AD Switches 6 A-25 A A and AD switches have 4 contacts in each switching stage. These switches provide an extensive range of switch functions and require a minimum mounting depth. Up to 36 switching positions are possible, with availability of 48 contacts per 12 stage switch column.	110
CG, CH and CHR Switches 10 A-25 A Ultra compact CG, CH and CHR switches are ideally suited for control and instrumentation applications. Switch terminals are “finger-proof” and conveniently accessible for wiring and are delivered open. All CG4 switches offer specially designed gold plated contacts or H-bridges with “cross-wire” contact systems, which facilitates their use in electronic circuitry and chemically aggressive environments.	120
DH, DHR, DK and DKR Switches 6 A-16 A DH, DHR, DK and DKR switches incorporate unique corrosion resistant contacts that permit operation on system voltage as low as 1 V. They have fully enclosed and protected contacts which can be operated either by rotary and/or lateral handle movement. D switches are used in calibration and semiconductor circuits. They are also used for relay and contactor control.	130
X Switches 200 A-630 A X switches can be applied for load, tap and gang switching duties. They incorporate 6 contacts in each switching stage. Their compact design provides a minimum length dimension for mounting purposes.	140
KG Switches 20 A-315 A and KH and KHR Switches 16 A-80 A KG, KH and KHR switches are excellent circuit interruptors. They have high through fault and fault making capacities and are especially designed for use as isolators and safety switches for machine tools, distribution panels and switchboards. KG ON/OFF switches offer unusually high dimensioned air and creepage distances between terminals which are designed for time saving “straight-line” wiring. ON/OFF switches are available with up to 8 poles and double-throw switches are available with up to 4 poles.	150
Contactors 16 A-115 A and Motor Starters 1,1 kW-55 kW These include control relays, motor contactors, two and four pole output contactors, heating contactors, thermal overload relays.	200
Push Buttons and Pilot Lights, 22,5 mm Ø A complete range of state-of-the-art push buttons and pilot lights represent an ideal combination of functional security and economical efficiency in a modular design.	302

SALES AND SERVICE ORGANIZATION

Australia

australian solenoid Φ co.pty. ltd.

379 Liverpool Road, ASHFIELD, N.S.W. 2131
P. O. Box 1093, ASHFIELD, N.S.W. 1800
Tel: +61 2 9797-7333, Fax: 0092
e-mail: sales@austrasol.com.au

Austria

austro solenoid Φ ges.m.b.h.

Schumanngasse 35, Postfach 431
A-1181 WIEN
Tel: +43 1 404 06, Fax: 404 06-190
e-mail: aso@krausnaimer.com

Belgium, Luxembourg

solenoid benelux Φ b. v.

Ikaros Business Park
Ikaroslaan 2
B-1930 ZAVENTHEM
Tel: +32 2 757-0141, Fax: 1640
e-mail: sales@bensol.be

Brazil

solenoid do brasil Φ ltda.

Avenida Berna 230
04774-020 SAO PAULO
Tel: +55 11 2198-1288, Fax: 1251
e-mail: knbrasil@krausnaimer.com.br

Canada

canadian solenoid Φ inc.

219 Connie Crescent, Unit 13A
CONCORD, Ontario, L4K 1L4
Tel: +1 905 738-1666, Fax: 9327
e-mail: cdnsolenoid@cansol.on.ca

Chile

ASEA BROWN BOVERI S. A.
Vicuña Mackenna 1602, Casilla 3555
SANTIAGO DE CHILE
Tel: +56 2 544-7411, Fax: 7418

Cyprus

ELECTROMATIC CONSTRUCTIONS LTD.
72, Evagoras Pallikarides Str., CY-2235 LATSIA-Nicosia
P. O. Box 12630, CY-2251 LATSIA-Nicosia
Tel: +357 2 48 41 41, Fax: 48 57 47

Czech Republic

OBZOR, výrobní družstvo Zlín
Louky-Slanica 378
CZ-76413 ZLÍN
Tel: +420 57 7195-111/-153 (Techn. Supp.)
Fax: +420 57 7195-152/-138
e-mail: ots@obzor.cz

Denmark

THIIM A/S
Transformervej 31
DK-2730 HERLEV
Tel: +45 4485 8000, Fax: 8005
e-mail: thiim@thiim.com

Finland

suomen solenoid Φ oy

Karitie 7
FIN-01530 VANTAA
Tel: +358 9 825-424-0, Fax: 424-10
e-mail: etunimi.sukunimi@finsol.fi

France

solenoid france Φ s. a.

33, rue Bobillot
F-75013 PARIS
Tel: +33 1 58 40 80 80, Fax: 45 80 91 19
e-mail: sales@solfrance.fr

Germany

deutsche solenoid Φ vertriebs-gmbh

Wikingerstraße 20-28, D-76189 KARLSRUHE
Postfach 10 01 24, D-76231 KARLSRUHE
Tel: +49 721 59 88-0, Fax: 59 28 28
e-mail: desol@krausnaimer.com

Great Britain

u. k. solenoid Φ ltd.

115 London Road
NEWBURY/BERKSHIRE RG14 2AH
Tel: +44 1635 45991, Fax: 37807
e-mail: sales@uksol.co.uk

Greece

KALAMARAKIS-SAPOUNAS S. A.
Ionias & Neromilou Str., P. O. Box 46566
GR-13671 ACHARNES/ATHENS
Tel: +30 2 10 240-6000-6, Fax: 240-6007
e-mail: ksa@ksa.gr

Hungary

GANZ, Schalter- u. Gerätefabrik
X, Köbányal út 41/c, Postfach 87
H-1475 BUDAPEST
Tel: +36 1 261-5479, Fax: 4685
e-mail: ganzkk@ganzkk.hu

Iceland

BRAEDURNIR ORMSSON EHF
Lágmúli 6-9, P. O. Box 8670
REYKJAVIK
Tel: +354 530-28 00, Fax: 28 10
e-mail: skuli@ormsson.is

India

Liaison Office, Solenoid Singapore Pte Ltd
12/103, Tulsidham Kalyani CHS Ltd
SV Road, Majiwade
THANE (W) 400610, Maharashtra
Tel: +91 22 2589-8450, Fax: 8450
e-mail: kane.shriram@singsol.co.in

Republic of Ireland

irish solenoid Φ ltd.

Bay 145, Shannon Free Zone
SHANNON, Co. Clare
Tel: +353 61 704700, Fax: 471084
e-mail: salesirs@krausnaimer.ie

Italy

solenoid italia Φ s.r.l.

Via Terracini, 9
I-24047 TREVIGLIO (BG)
Tel: +39 0363-30 11 12, Fax: 30 21 13
e-mail: infoits@italsol.it

Japan

solenoid japan Φ co. ltd.

Yoshiwada Building 2F
1-11-6 Hamamatsucho
Minato-Ku, TOKYO 105-0013
Tel: +81 3 3436-6151, Fax: 6325
e-mail: kazumi.nakazato@japsol.co.jp

Kuwait

AMMAR & PARTNERS ELECTRICAL CO.
P. O. Box 1871
13019 SAFAT
Tel: +965 483-0122/483-0133
Fax: +965 484-1818

Malaysia

INDUSTRIAL AUTOMATION (M) SDN BHD
158 Jalan Loke Yew 52200
KUALA LUMPUR
Tel: +60 3-9-2210511, Fax: 2222299
e-mail: inquiry@iasb.com.my

Mexico

ING. JAVIER CABALLERO B.
A. Gaviño 30, Satélite,
53100, Edo. de Mexico, MEXICO
Tel: +52 5555 62-7577, Fax: 0434
e-mail: j_caballero_b@infosel.net.mx

Netherlands

solenoid benelux Φ b. v.

Wegtersweg 38, Postbus 199
NL-7556 BR HENGEL (Ov.)
Tel: +31 74 291-9441, Fax: 8380
e-mail: sales@bensol.nl

New Zealand

new zealand solenoid Φ co. ltd.

42 Miramar Avenue, WELLINGTON 6022
P. O. Box 15-009, WELLINGTON 6243
Tel: +64 4 380-9888, Fax: 9877
e-mail: sales@nzsolenoid.co.nz

Norway

norsk solenoid Φ a/s

Hjalmar Brantings vei 8, P. O. Box 21, Økern
N-0508 OSLO
Tel: +47 22 64 44 20, Fax: 65 39 49
e-mail: nos@norsksol.no

Poland

ASTAT sp. z o.o.
ul. Dąbrowskiego 461
PL-60451 POZNAŃ
Tel: +48 61 848-8871/72, Fax: 8276
e-mail: info@astat.com.pl

Portugal

ELECTRICOL-DAMAS, FERREIRA & DAMASCENO, S. A.
Apartado 1083, S. Ant. Cavaleiros
P-2670 LOURES
Tel: +351 21 989-8939, Fax: 988-6464

Singapore

solenoid singapore Φ pte. ltd.

115A, Commonwealth Drive
03-17/23
SINGAPORE 149 596
Tel: +65 6473-8166, Fax: 8643
e-mail: krausnaimer@singsol.com.sg

Slovenia

SCHRACK Energietechnik d.o.o.
Glavni trg 47
SI-2380 SLOVENJ GRADEC
Tel: +386 2 88 392 00, Fax: 434 71
e-mail: schrack.sg@schrack-energietechnik.si

Republic of South Africa

south african solenoid Φ co.pty. ltd.

7 Village Crescent, Linbro Village
Linbro Business Park, SANDTON 2065
P. O. Box 511, KELVIN 2054
Tel: +27 11 608-6060, Fax: 608-2874
e-mail: sales@sasolenoid.co.za

Spain

HAZEMEYER ESPAÑOLA S. A.
C/ta. de Tiana s/n, Esq. N-2
BADALONA-BARCELONA
Tel: +34 93 389-4262, Fax: 384-3586
e-mail: konno@grupo-hes.net

Sweden

skandinaviska solenoid Φ ab

Dr. Widerströms Gata 11, FRUÅNGEN
Box 42097, S-126 14 STOCKHOLM
Tel: +46 8 97 00 80, Fax: 97 87 33
e-mail: order@skansol.se

Switzerland

AWAG Elektrotechnik AG
Sandbühlstraße 2, Postfach
CH-8604 VOLKETSCH
Tel: +41 44 908 19 19, Fax: 19 99
e-mail: info@awag.ch, www.awag.ch

Taiwan

NUWTEC ENTERPRISE Co Ltd
No. 301, Sec. 1, Nan Kang Road
TAIPEI 115, Taiwan, R. o. C.
Tel: +886 2 265-13279, Fax: 13264
e-mail: nathan.nuwtec@msa.hinet.net

Turkey

ÜNAL KARDEŞ ELEKTRİK GEREÇLERİ A. Ş.
Beşyol, Eski Londra Asfaltı-6
TR-34295 İSTANBUL-Sefaköy
Tel: +90 212 624-9204, Fax: 592-4810
e-mail: info@unalkardes.com.tr

USA

american solenoid Φ co. inc.

760 New Brunswick Road
SOMERSET, NJ 08873
Tel: +1 732 560-1240, Fax: 8823
e-mail: amsol@krausnaimer-us.com

